

TURBO CONTROL SIFTER

HSTKSF

The Turbo Control Sifter (HSTKSF) is used to separate foreign materials, from the flour and ensures perfectly clean product.

Features & Advantages


- Easy cleaning and maintenance
- Low energy consumption
- Trouble free operation
- Simple design



HENRY SIMON
MANCHESTER 1878

↓ Front View

↓ Side View

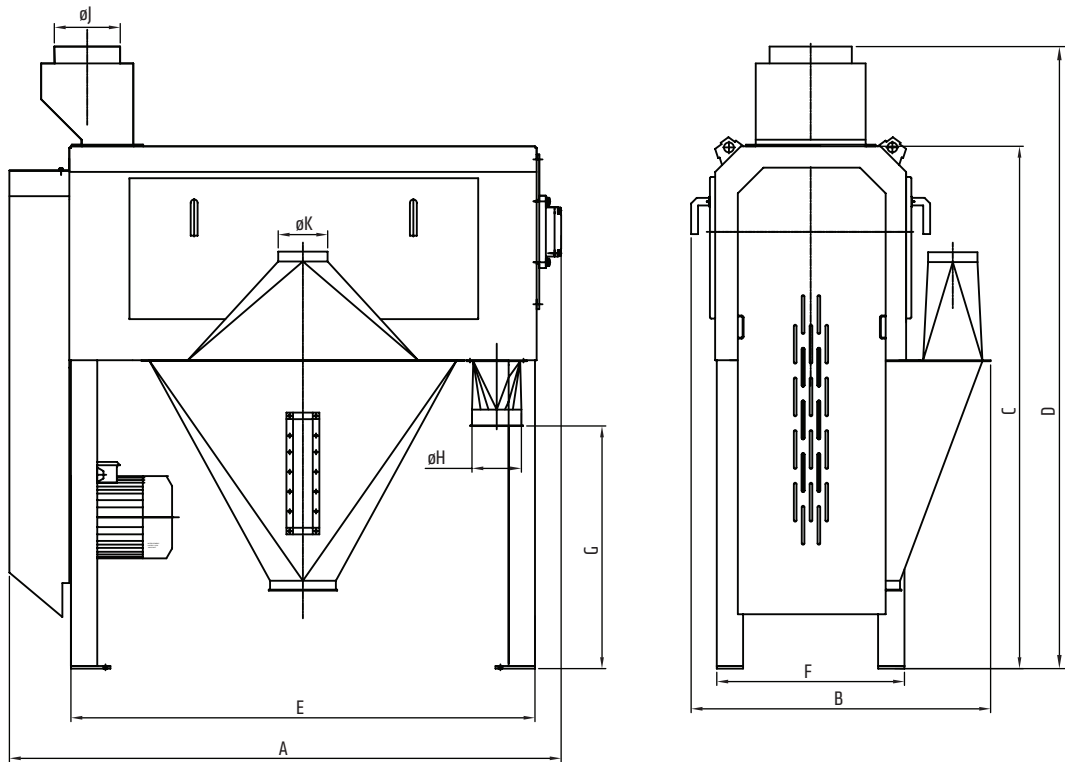

Technical Features

Model	Capacity (TPH)	Screen Holes (ømm)	Air Requirement (m³/min)	Motor Power (kW)	Weight (Kg)		Gross Volume (m³)
					Net	Gross	
HSTKSF 40 / 100	8	1.5	20	5.5	450	642	4
	12	2					
	24	3					
	28	4					
HSTKSF 50 / 120	10	1.5	25	11	492	700	4.9
	15	2					
	30	3					
	35	4					

Dimensions (mm)

Model	A	B	C	D	E	F	G	øH	øI	øJ	øK
HSTKSF 40 / 100	1,676	910	1,590	1,890	1,410	570	737	150	250	ø250	ø150
HSTKSF 50 / 120	1,895	955			1,610	600	650				

*Henry Simon reserves the right to change, delete, or otherwise modify the information which is represented without any prior notice.