

HSKDMB

TUBULAR MAGNET

- Tubular Magnet is used for the elimination of metal particles from product during the flow.

It is an in-line magnetic separator which is installed on spouting lines.

FEATURES

- Hygienic Design
- Strong Magnetic Field
- Small Space Requirement
- Easy Cleaning
- Trouble-Free Operation




ADVANCED
SENSOR
TECHNOLOGY

HSKDMB

TUBULAR MAGNET

AIMANT TUBULAIRE

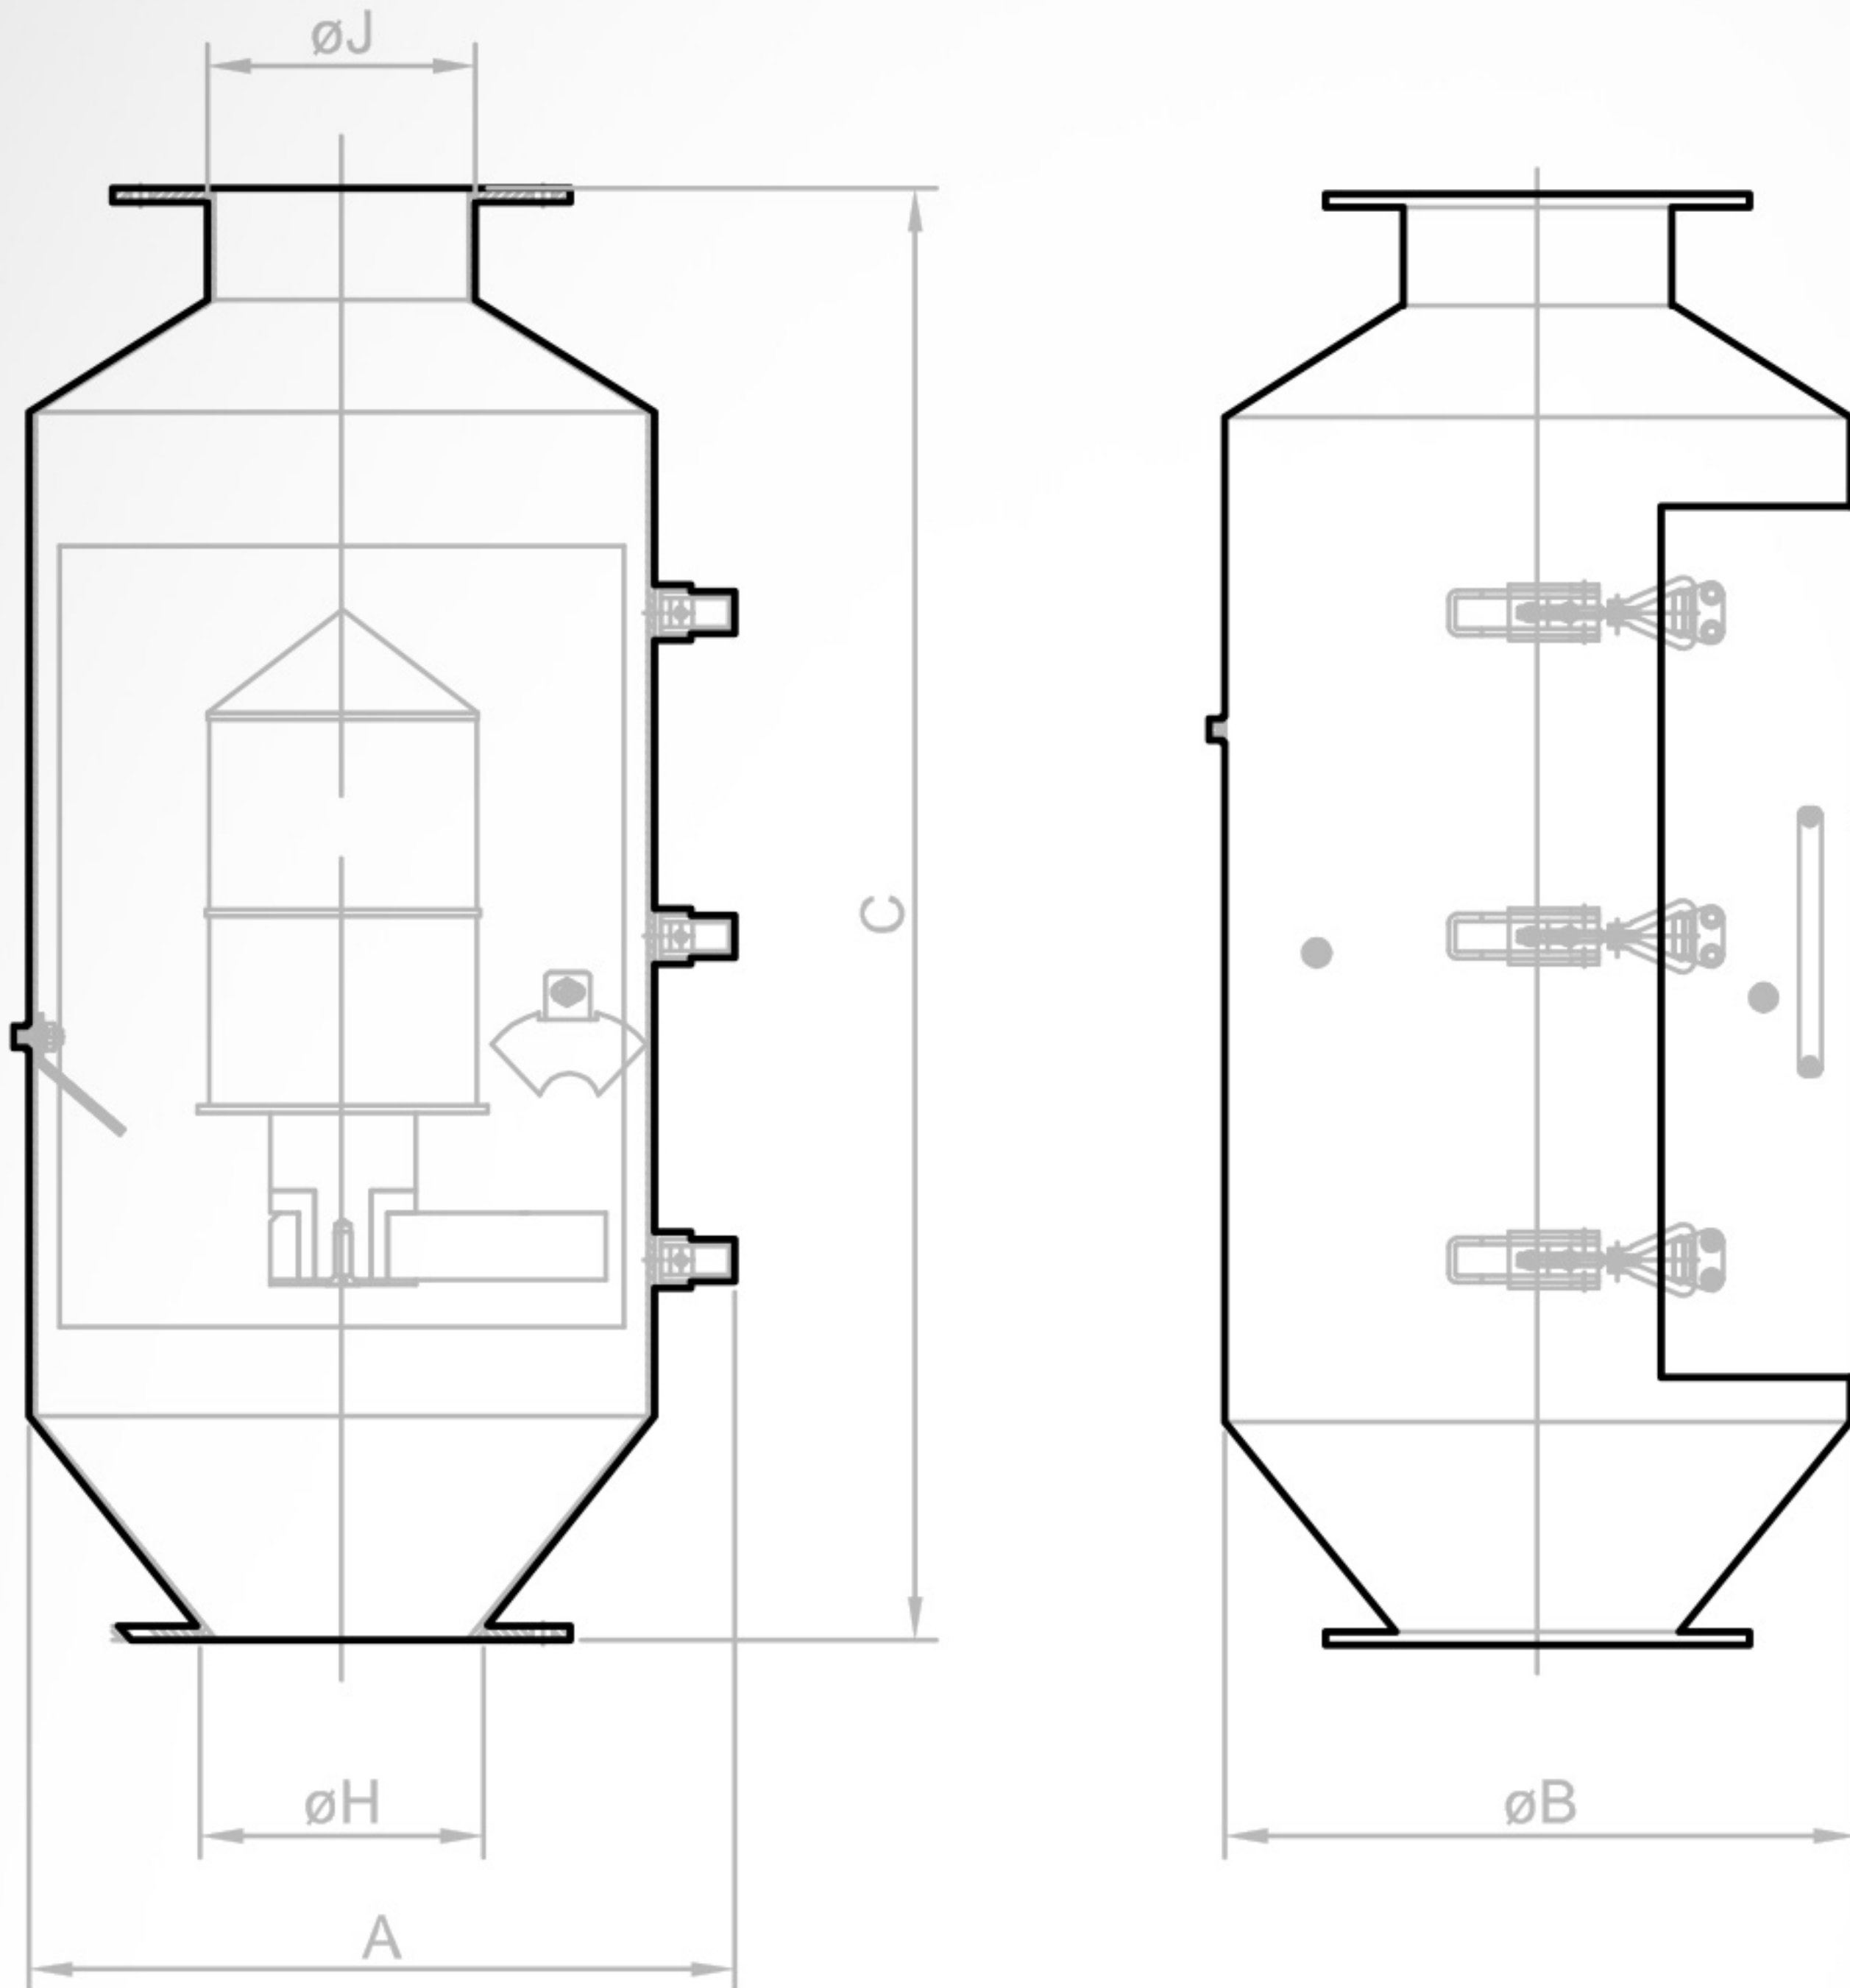

MODEL	DIMENSIONS mm.					TECHNICAL FEATURES							
	A	øB	C	øH	øJ	Capacity-Capacité (t/h)					Weight Kg		Gross volume m³
						Wheat	Flour	Bran	Semolina	Gauss	Net	Gross-Brut	
HSKDMB-120	315	280	650	120	120	10	7	4	9	2300	65	95	0,02
HSKDMB-150	335	300	650	150	150	17	13	7	15	2500	75	107	0,026
HSKDMB-170	355	320	680	170	170	33	24	13	29	3000	90	124	0,031
HSKDMB-200	415	380	720	200	200	46	34	18	40	3600	100	140	0,051
HSKDMB-250	445	410	900	250	250	83	61	33	72	4500	122	170	0,063
HSKDMB-300	516	480	900	300	300	125	92	50	108	5100	140	200	0,10