

BRAN FINISHER

HSDKFS

The Bran Finisher (HSDKFS) gently separates the bran from the flour with high efficiency, thereby plays an extensive role in increasing bran extraction rate.



Features & Advantages

- Different air inlet connection opportunity
 - Low energy consumption
 - High efficiency
 - Hygenic design
-



↓ Front View

↓ Side View

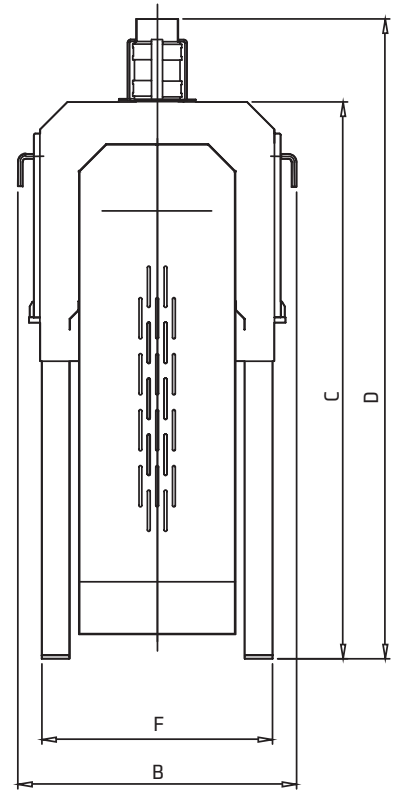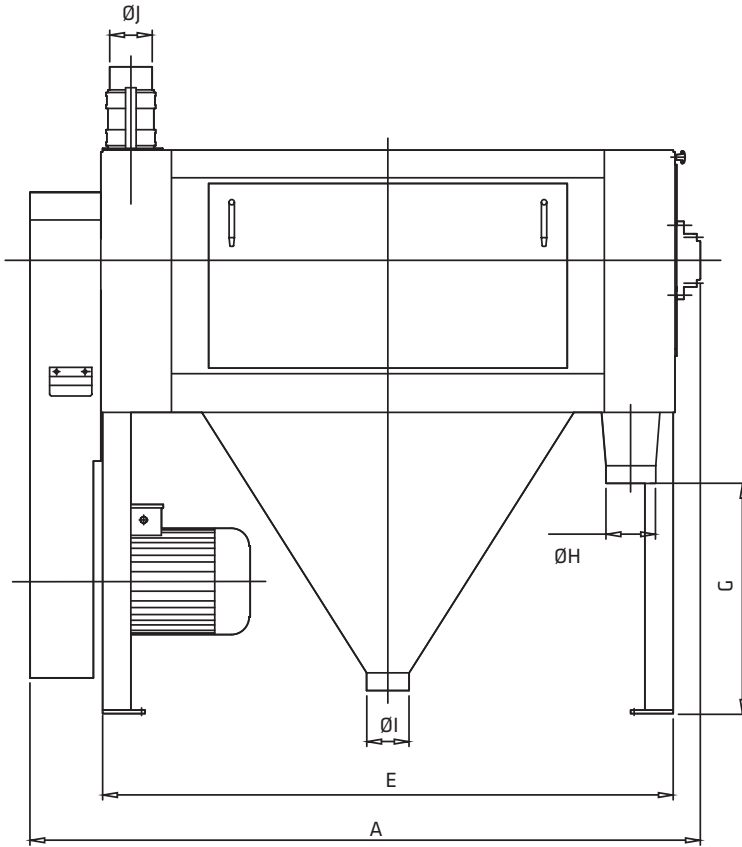

Technical Features

| Model | Capacity (TPH) | Motor Power (kW) | Air Requirement (m ³ /min) | Weight (Kg) | | Gross Volume (m ³) |
|-------------|----------------|------------------|---------------------------------------|-------------|-------|--------------------------------|
| | | | | Net | Gross | |
| HSDKFS 4010 | 1.5 - 1.8 | 5.5 - 7.5 | 8 | 464 | 657 | 4 |
| HSDKFS 5012 | 2 - 2.4 | 7.5 - 11 | 10 | 560 | 780 | 4.9 |

Dimensions (mm)

| Model | A | B | C | D | E | F | G | øH | øI | øU |
|-------------|-------|-----|-------|-------|-------|-----|-----|-----|-----|-----|
| HSDKFS 4010 | 1,680 | 730 | 1,590 | 1,890 | 1,410 | 410 | 785 | 120 | 120 | 120 |
| HSDKFS 5012 | 1,890 | 820 | | | 1,610 | 660 | 650 | 150 | | 150 |

* Capacity figures are given for wheat flour, and may vary for different product types.

*Henry Simon reserves the right to change, delete, or otherwise modify the information which is represented without any prior notice.