

HSDVBA

SCREW FEEDER

- Screw Feeder is used to ensure proper feeding of powdered or granular material at any required flow rate.


It is generally used at the feeding inlet of machines or pneumatic line, or especially for the collection of recovered flour from filters in flour mills.

FEATURES

- Robust Structure
- High Efficiency
- Low Power Consumption




— TYPE A

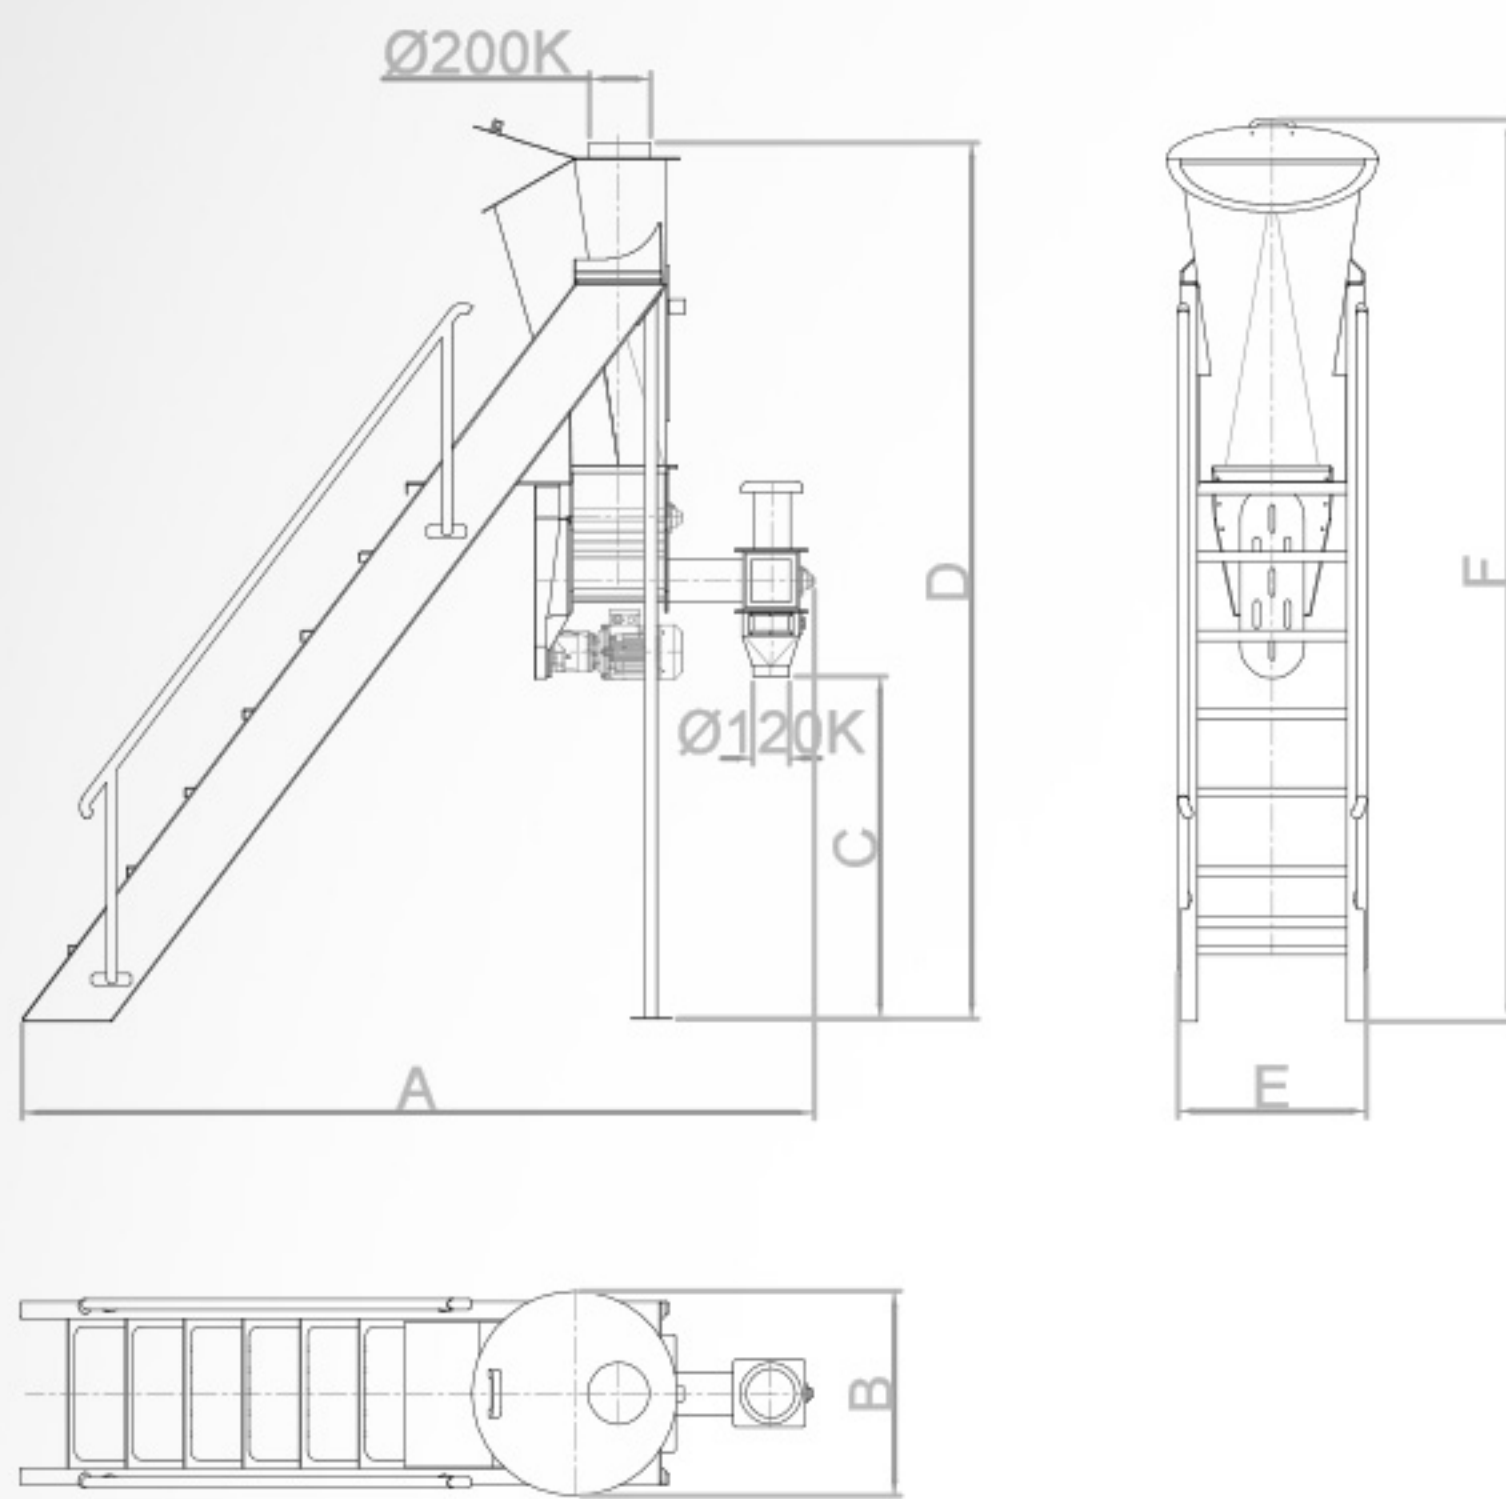

SEQUENCE LINE

— TYPE B

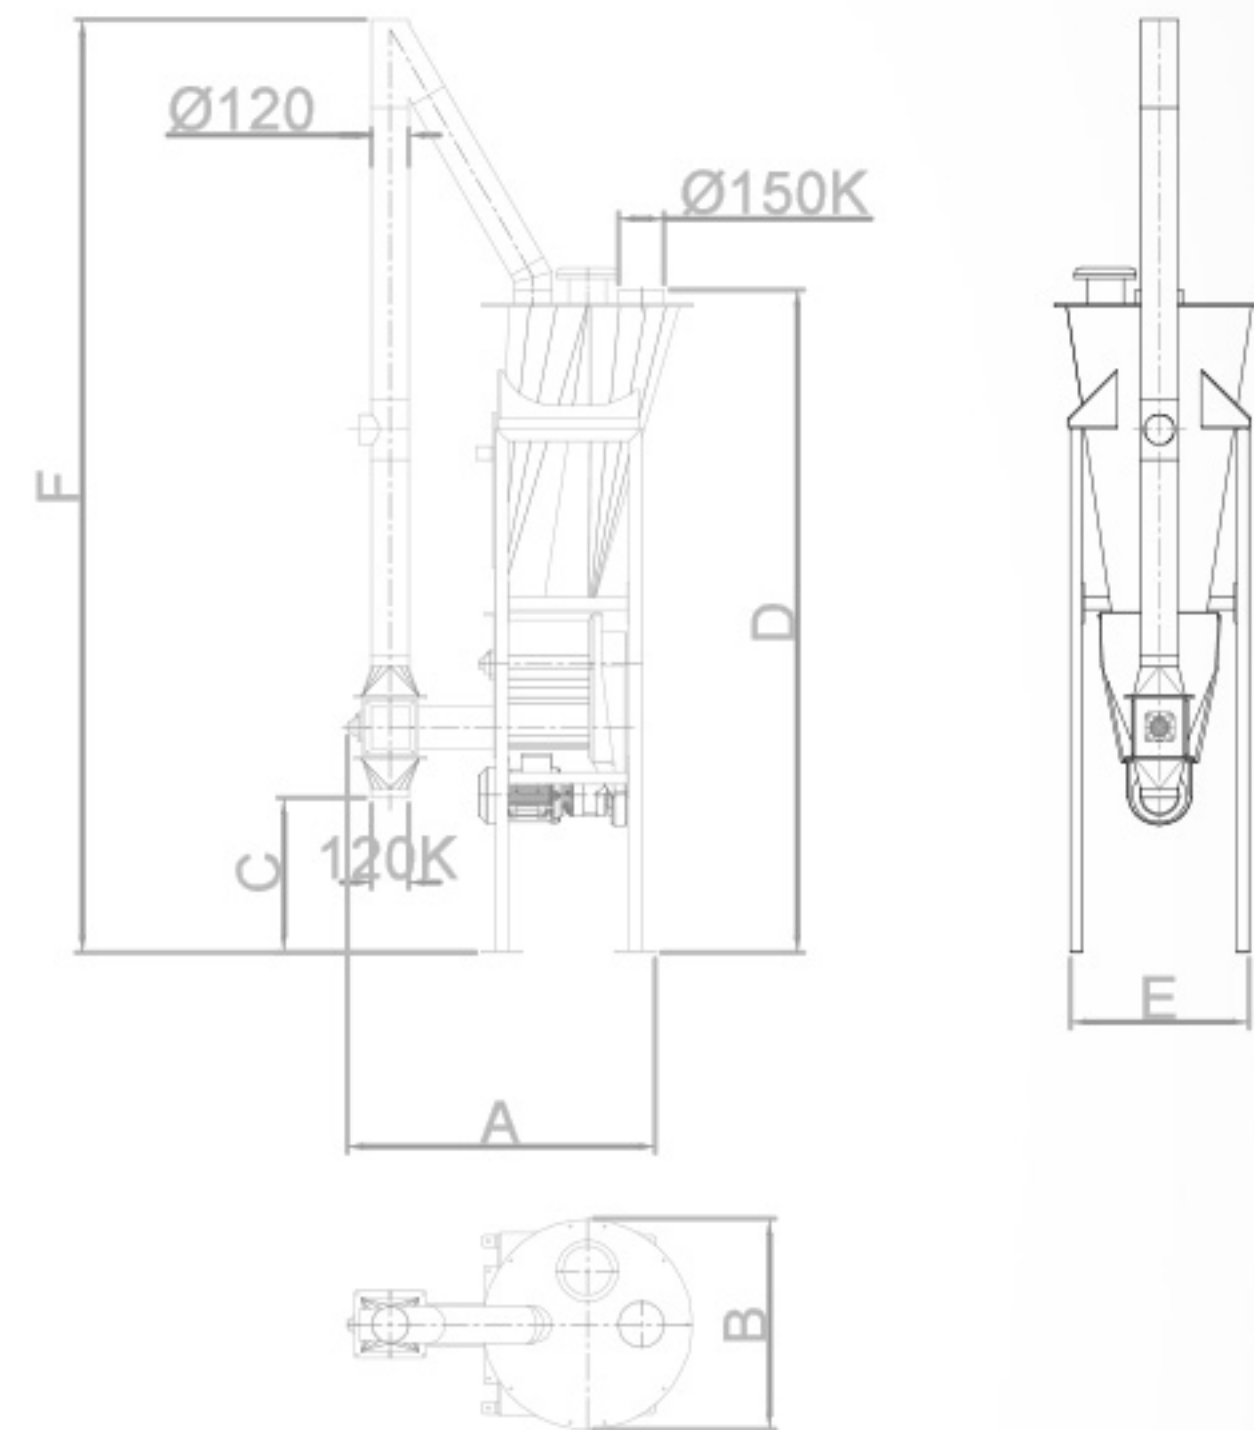

PNEUMATIC FILTER AND SWITCH FILTER

MODEL	DIMENSIONS mm.						TECHNICAL FEATURES		
	A	B	C	D	E	F	Motor (kW)	Weight Kg Net Gross	Gross volume m³
HSDVBA 125 A	2572	665	1113	2846	612	2926	0,75		
HSDVBA 125 B	1000	683	500	2150	581	3026			