

# HSDTTA

# VIBRO FEEDER

- Vibro Feeder is used to ensure proper product feeding at a constant flow rate.

It is generally used at the feeding inlet of machines or pneumatic line, or especially for the collection of recovered flour from filters in flour mills.

## FEATURES

- Robust Structure
- High Efficiency
- Low Power Consumption




ADVANCED  
SENSOR  
TECHNOLOGY

HSDTTA


# VIBRO FEEDER

VIBRO FEEDER

HSDTTA-200

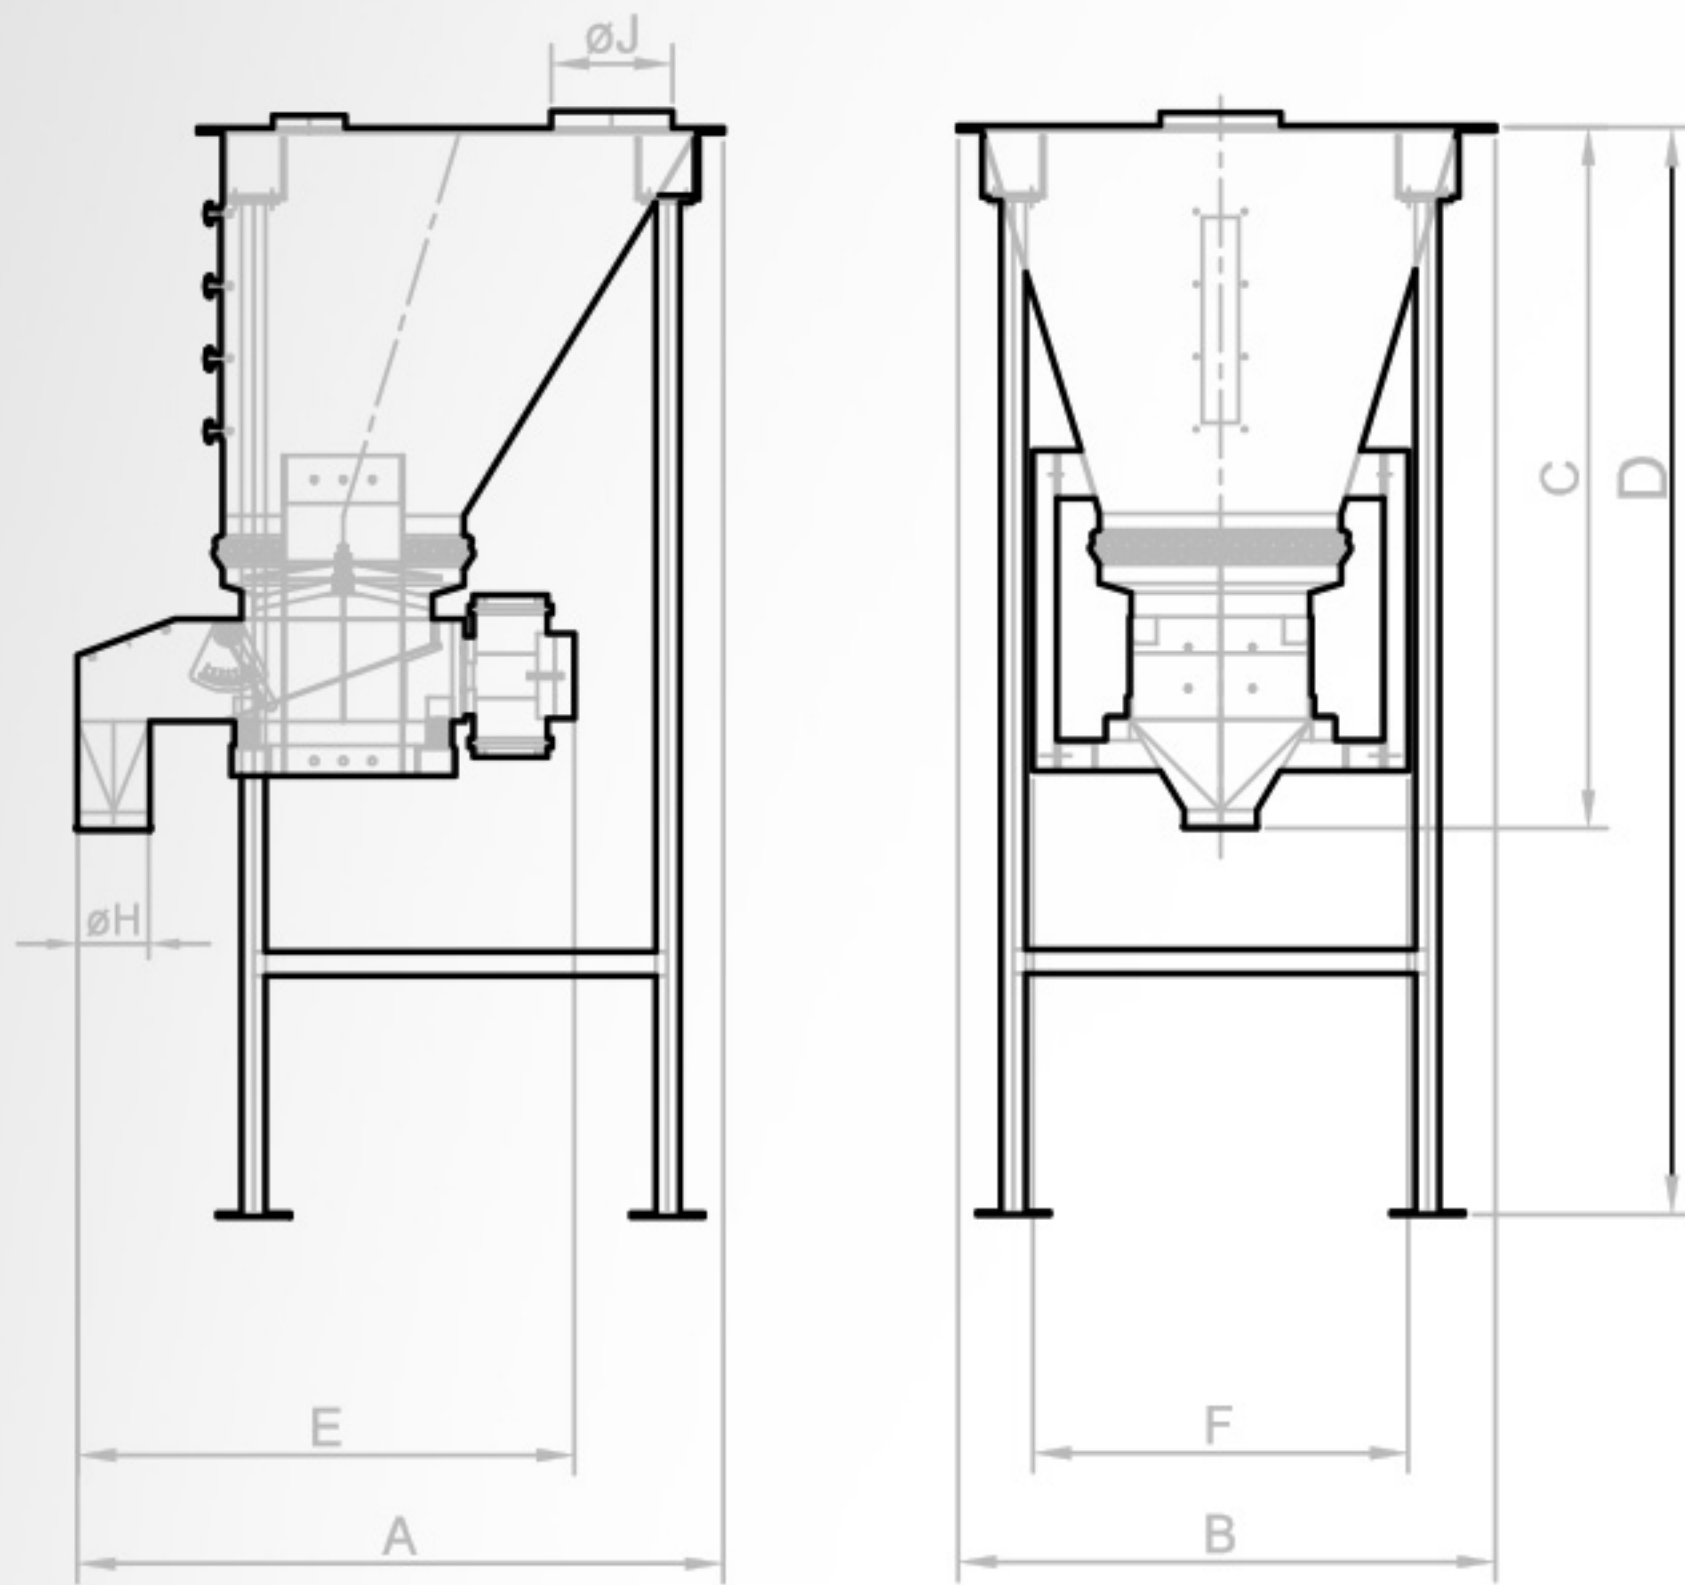

HSDTTA-V200

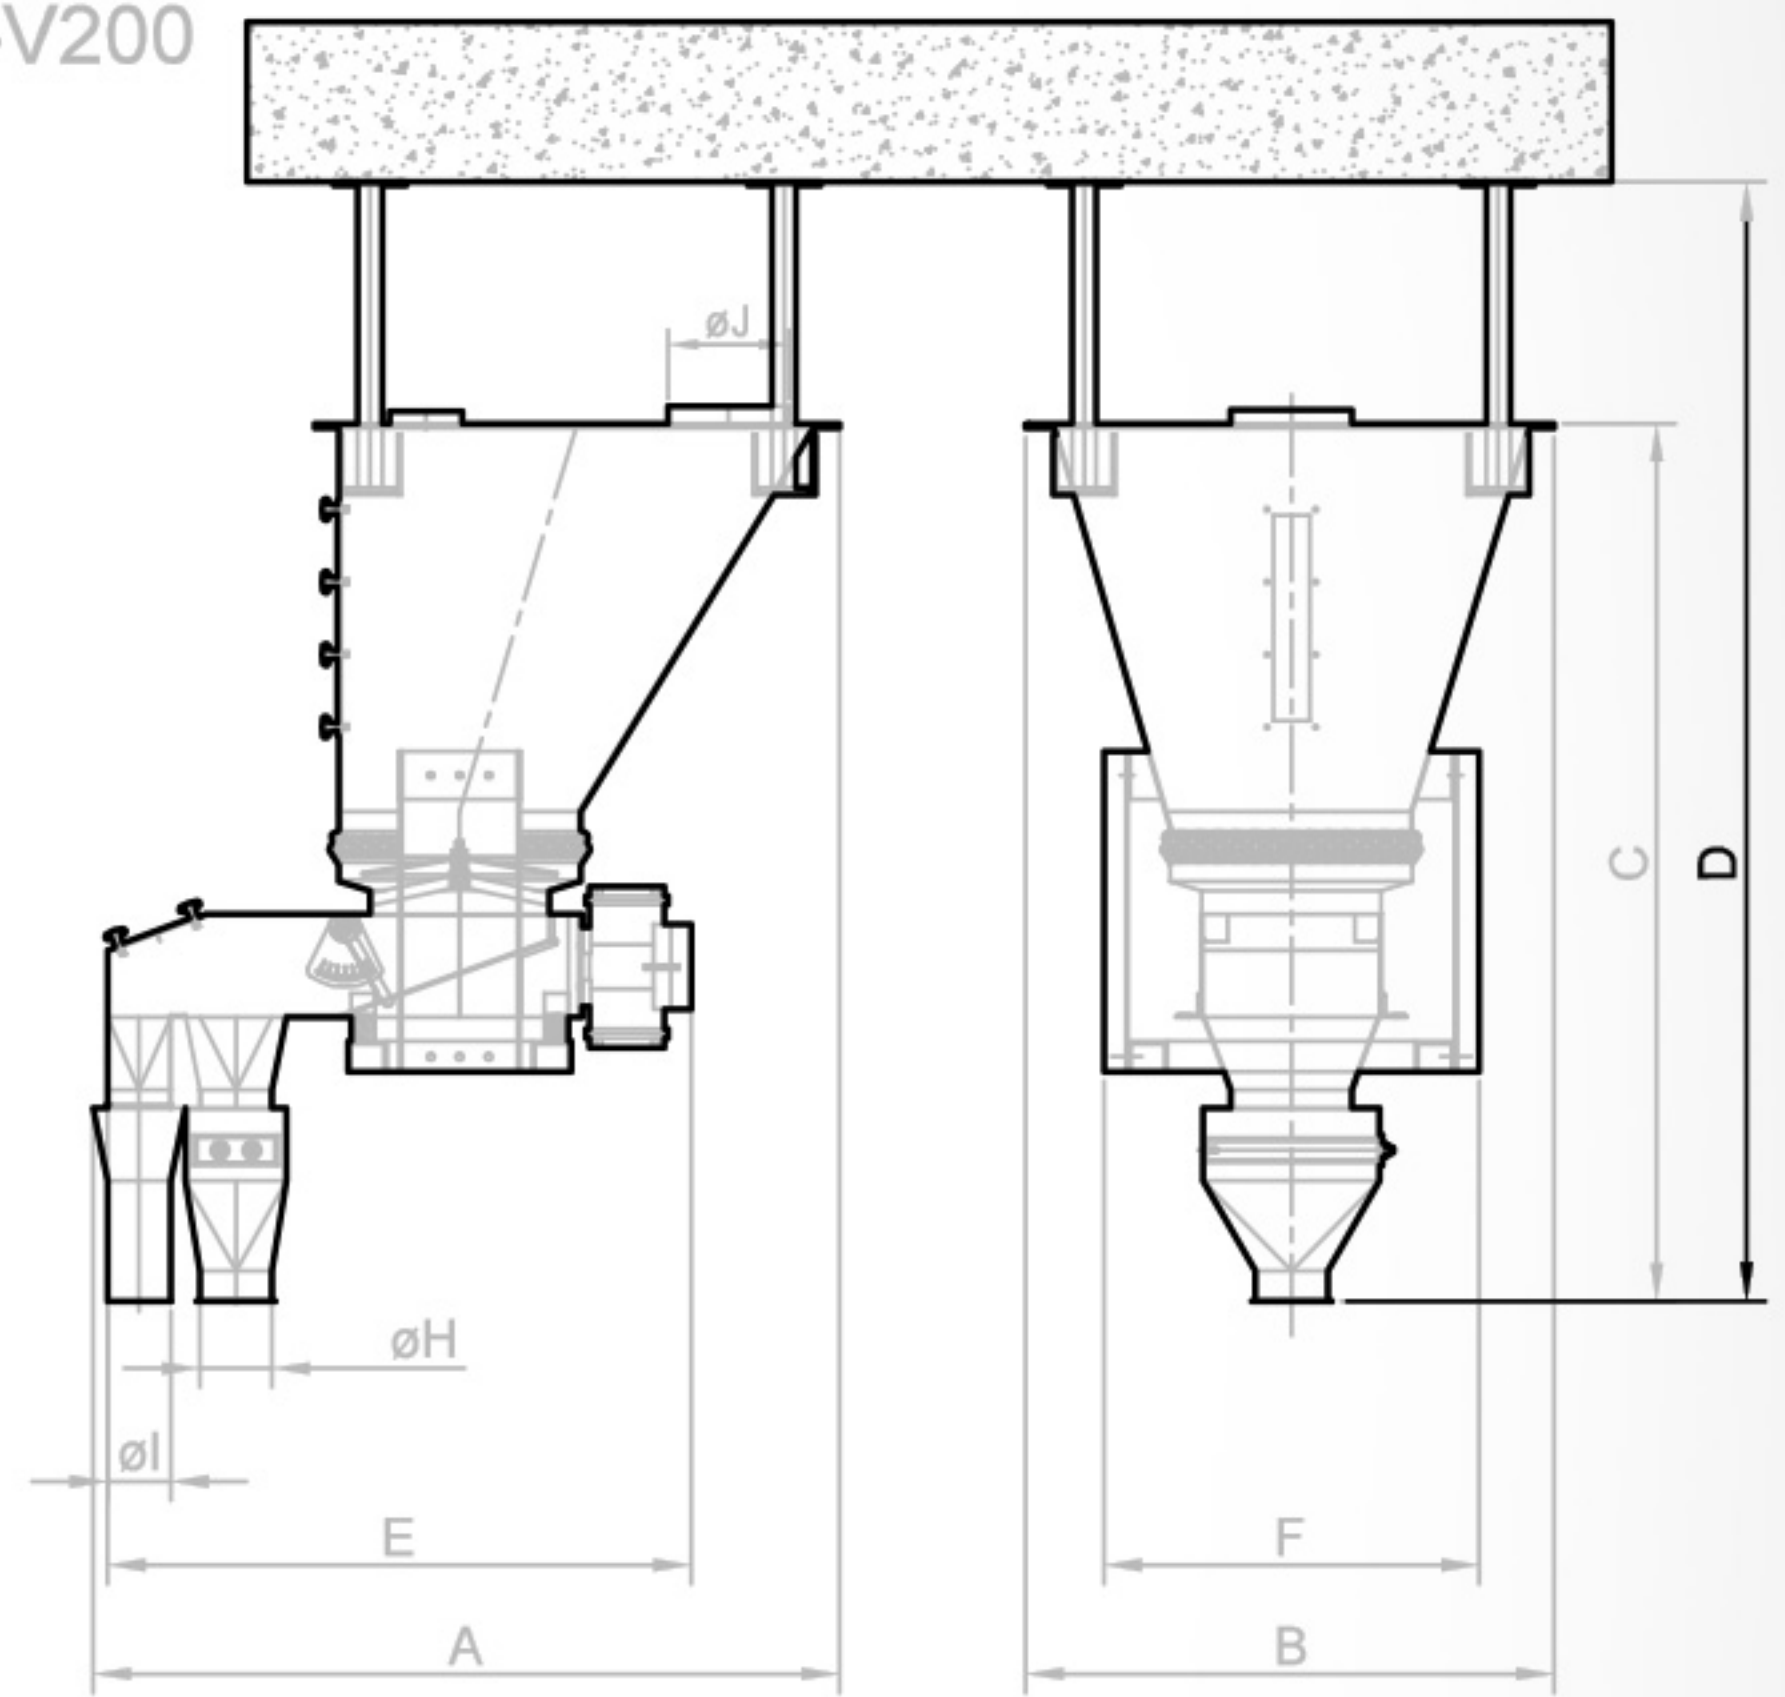

MODEL	DIMENSIONS mm.									TECHNICAL FEATURES			
	A	B	C	D	E	F	ØH	ØI	ØJ	Motor Kw	Weight Kg		Gross volume m³
											Net	Gross	
HSDTTA-200	1068	913	1160	1800	820	620	120	120	120	0,18	130	185	3,1
HSDTTA-V200	1234		1452	1852	965		150		120		150	145	200