


HSKBEA

BUCKET ELEVATOR

- Bucket Elevator is used for vertical conveying operations of granular or powdered products.

FEATURES

- Modular Structure
- Customized Design
- High Quality
- High Safety Standards:
- One direction drive system
- Anti-sliding sensor
- Rotation sensor
- Clogging sensor

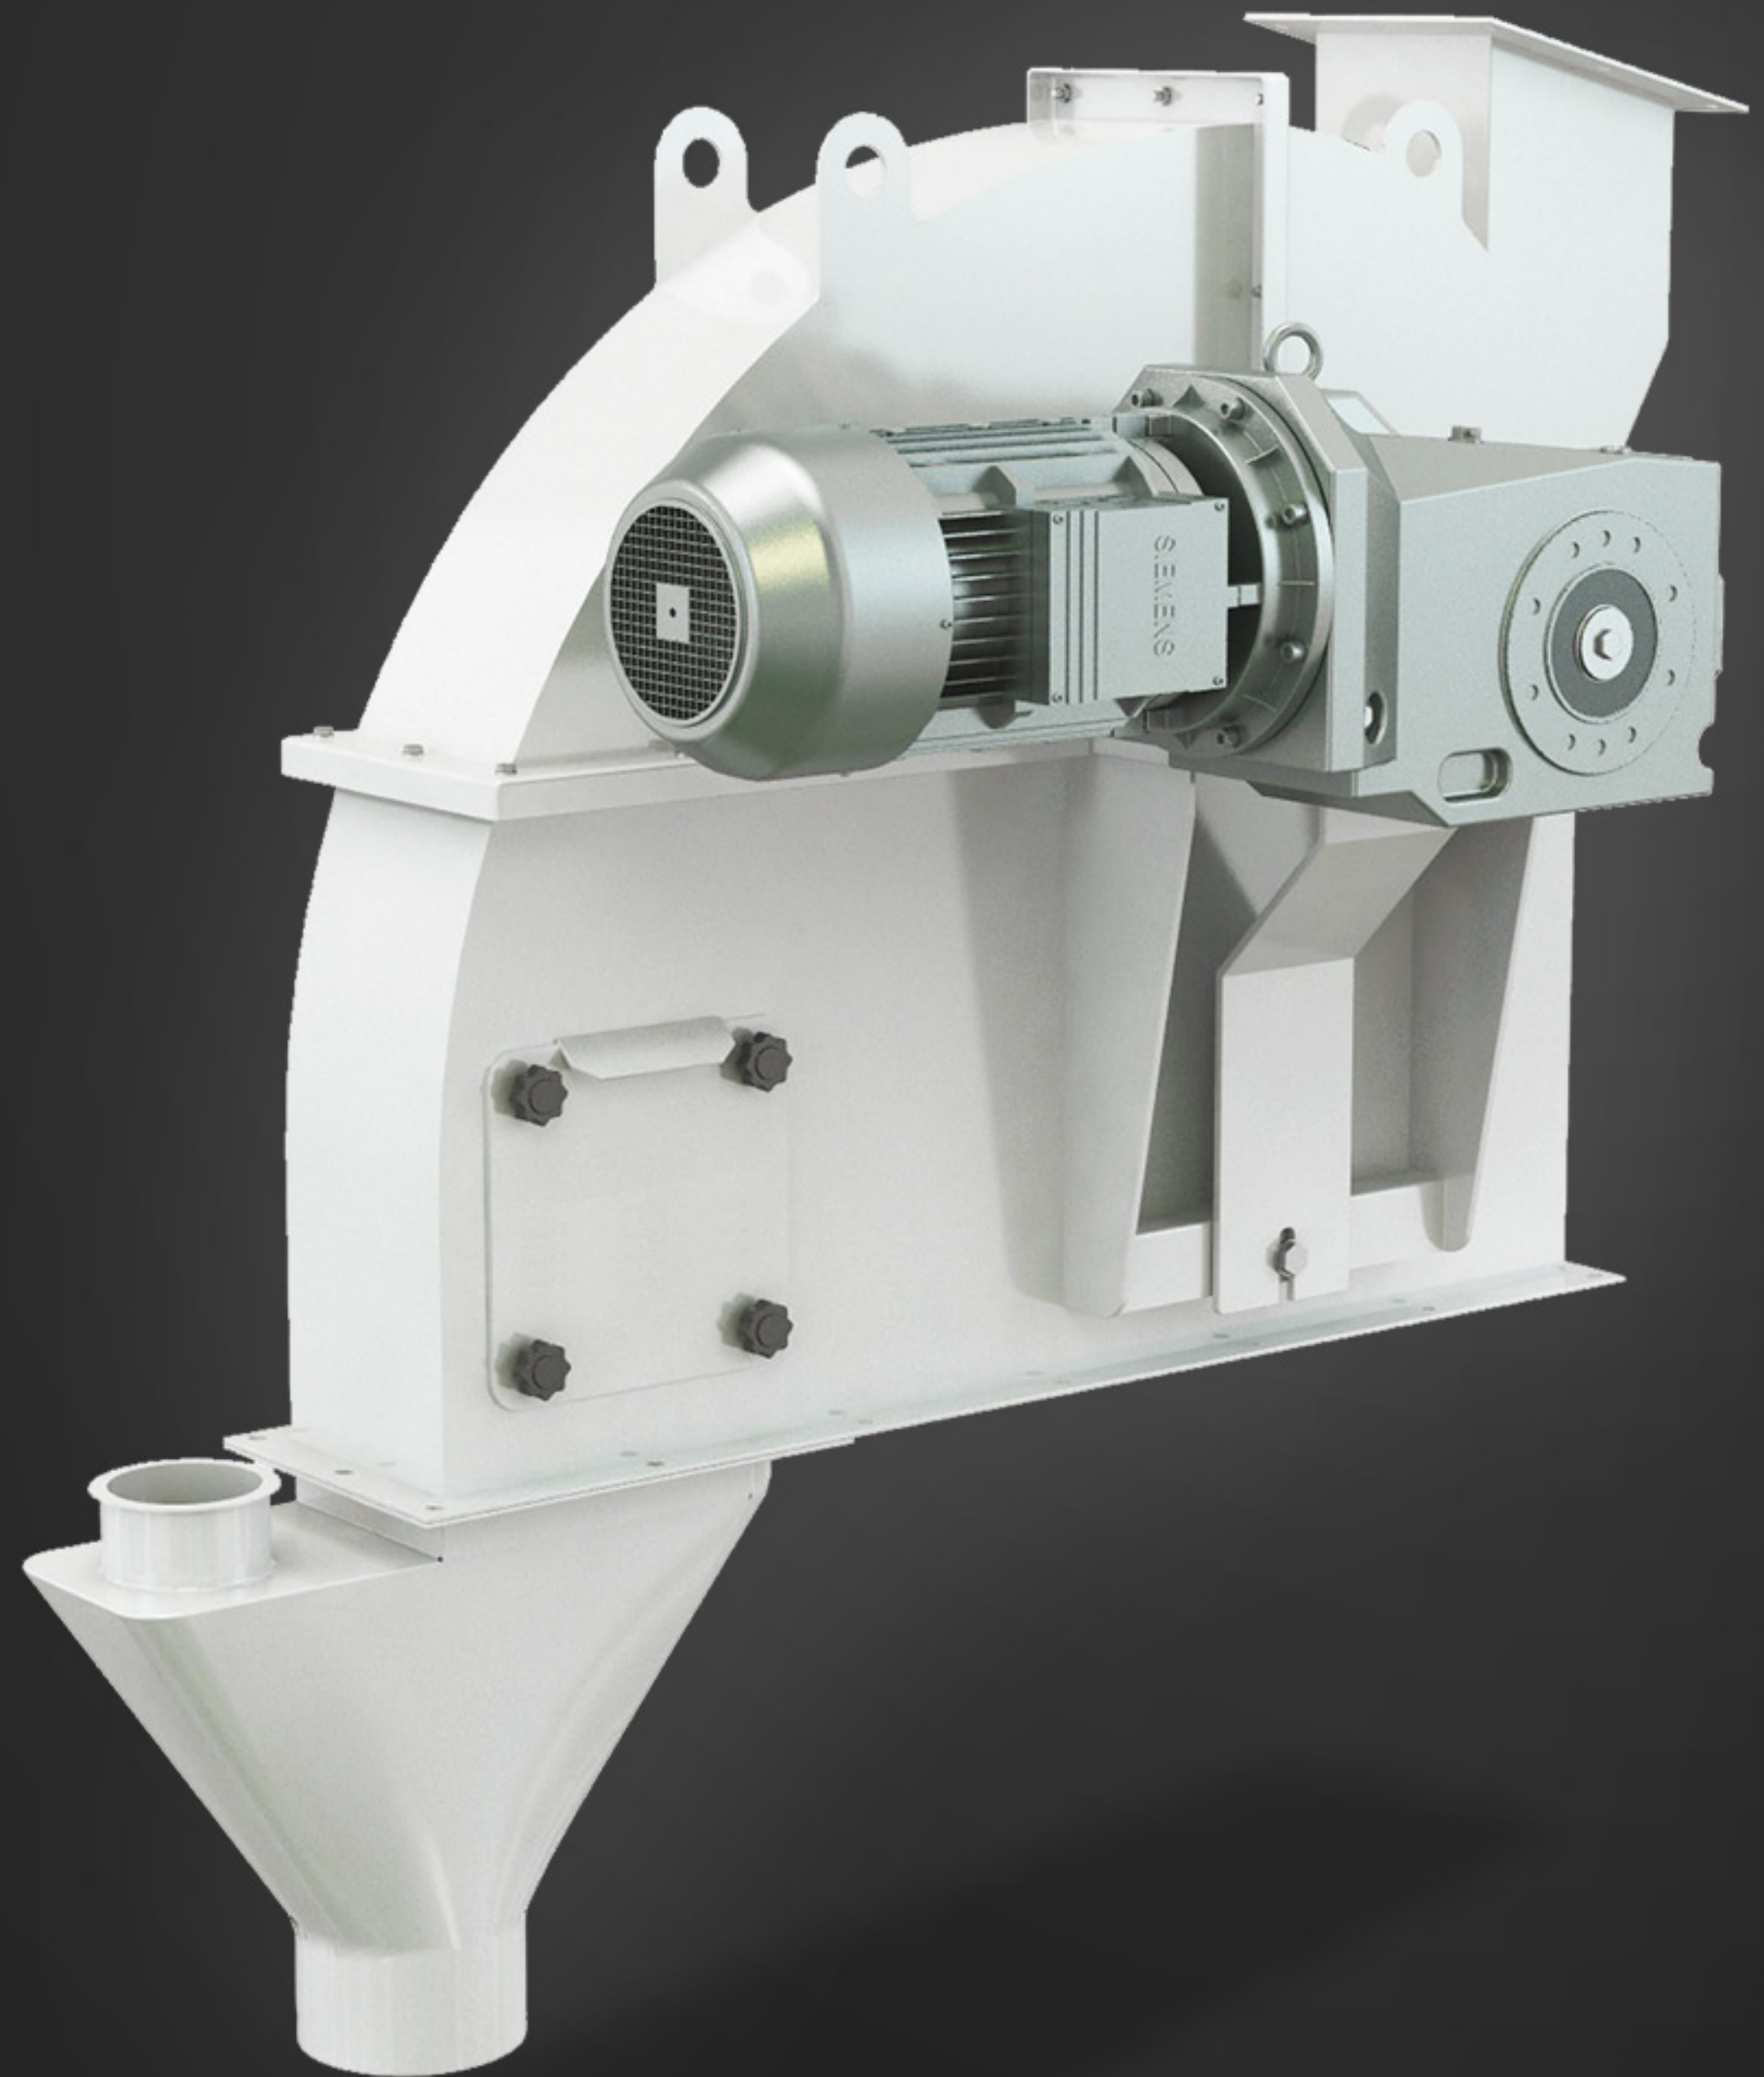


**ADVANCED
SENSOR
TECHNOLOGY**

HSKBEA

BUCKET ELEVATOR

ÉLÉVATEUR À GODETS

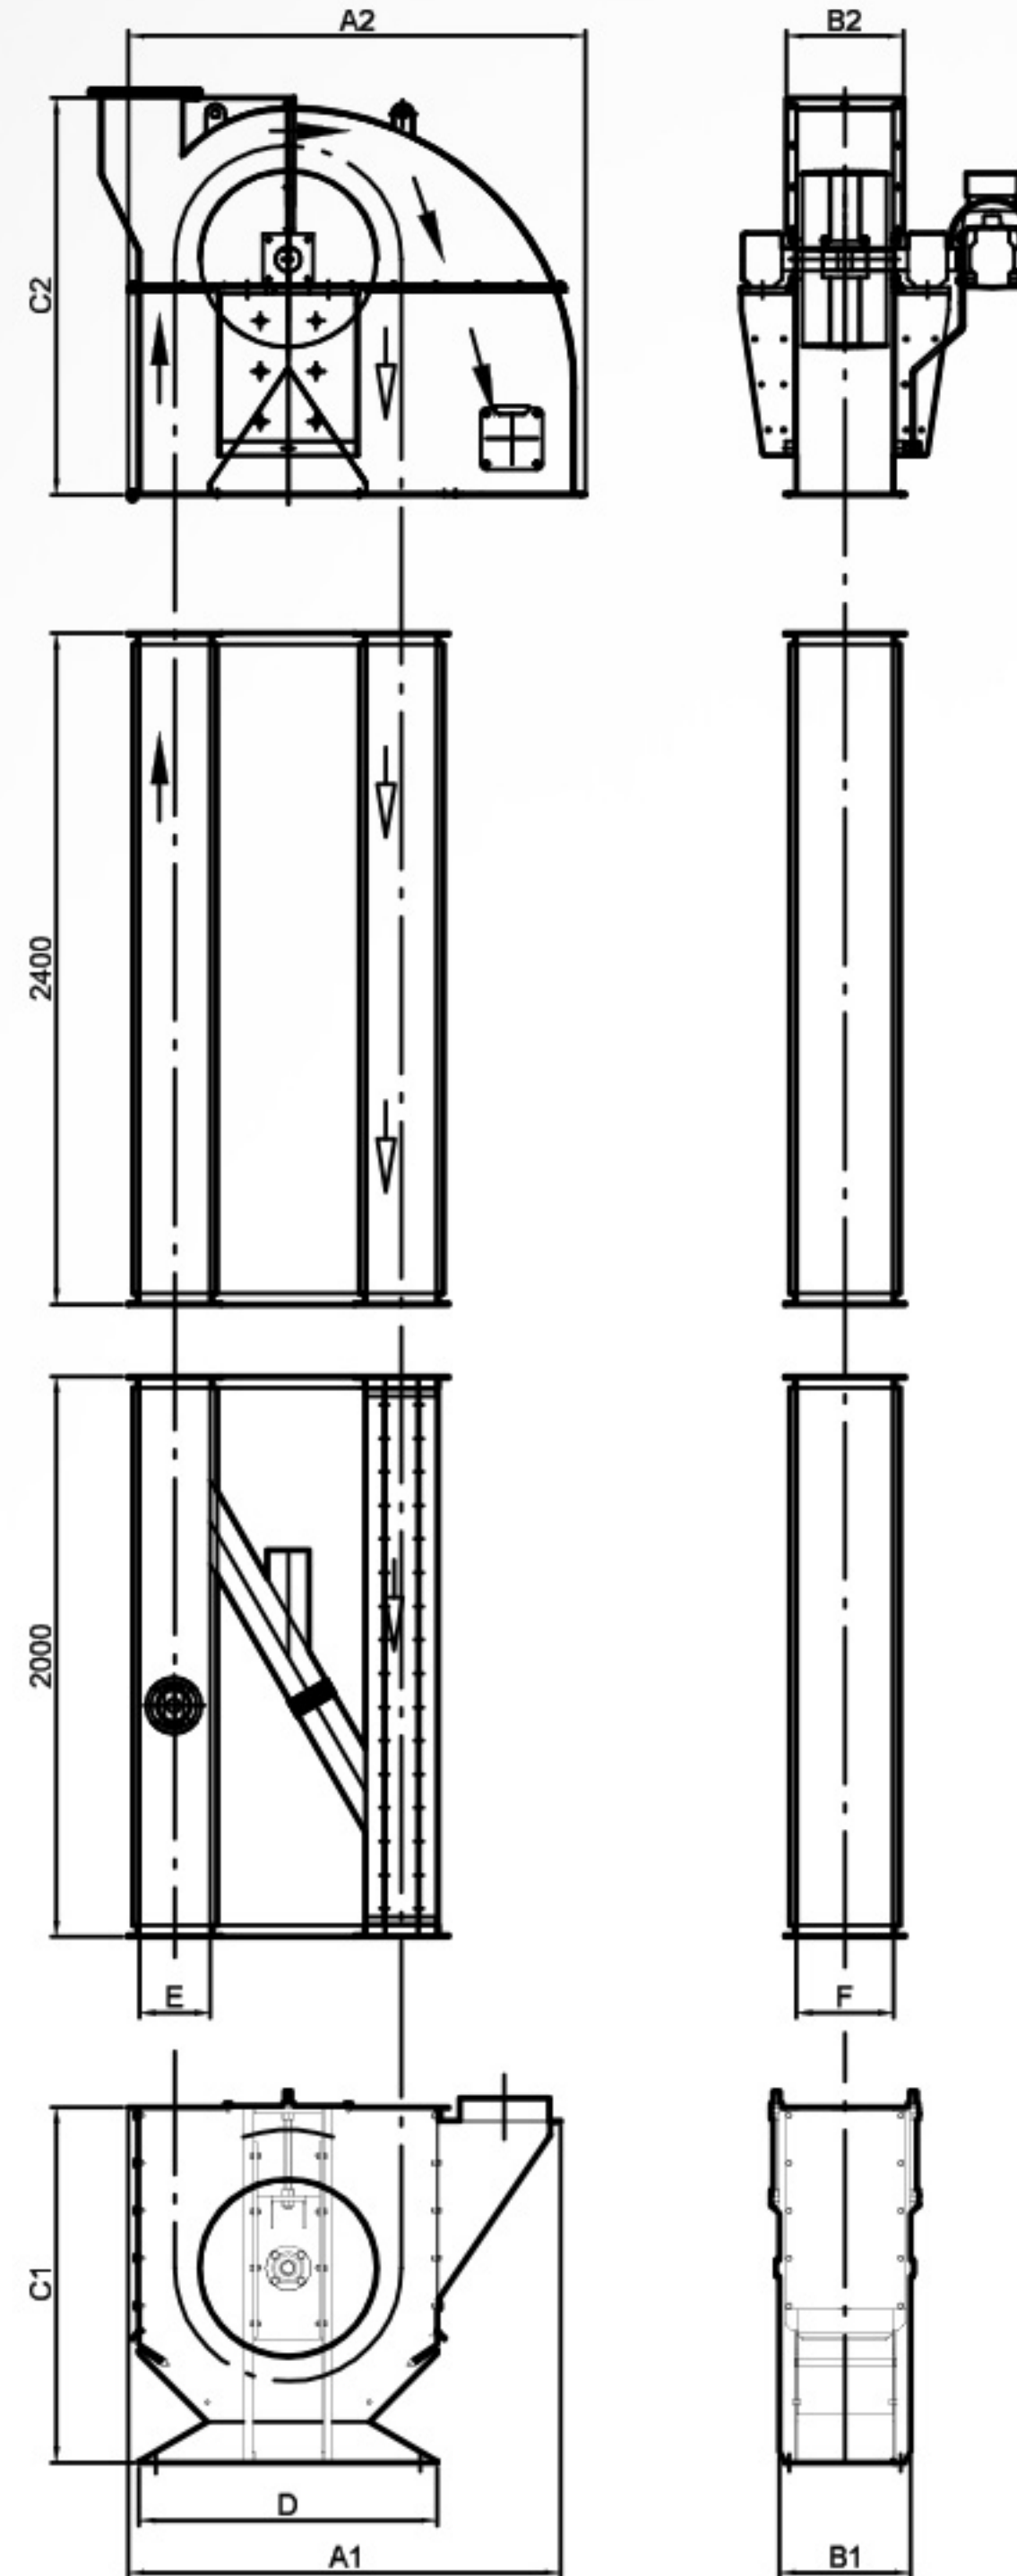

MODEL	DIMENSIONS mm.									TECHNICAL FEATURES	
	Product inlet			Product outlet			D	E	F	Pulley	
	A1	B1	C1	A2	B2	C2				ØDiam.	Width
HSKBEA 300/140	920	290	890	990	240	835	605	175	165	300	140
HSKBEA 400/200	1130	350	1035	1195	300	1030	750	205	220	400	200
HSKBEA 600/300	1545	470	1270	1635	420	1420	1065	250	345	600	300
HSKBEA 800/450	1920	595	1570	2545	523	2067	1440	370	465	800	450

MODEL	Bucket mxBucket	V=2,8 m/s rpm tr / mn	Capacity Wheat		V=2,6 m/s rpm tr / mn	Capacity Flour		V=2,6 m/s rpm tr / mn	Capacity Bran		V=2,8 m/s rpm tr / mn	Capacity Corn		V=2,6 m/s rpm tr / mn	Capacity Semolina	
			t / h	%75		t / h	%85		t/h	%70		t/h	%65		t/h	%80
HSKBEA 300/140	100 8	170	11		158	8,3		158	3,8		170	8,6		158	6,5	
HSKBEA 400/200	160 7	134	35,2		124	26,6		124	12,2		134	27,7		124	20,9	
HSKBEA 600/300	260 6	85	117,6		79	89,2		79	40,8		85	92,4		79	70	
HSKBEA 800/450	400 5	67	221,4		62	167,2		62	76,5		67	174		62	131,1	