


HSKHVA

SCREW CONVEYOR

- It is used to convey granular and grinded products in horizontal or limited angled directions, and mainly preferred at collecting, distributing, mixing and tempering processes in flour mills.

FEATURES

- Two-way Direction
- Compact Design
- Modular Structure
- Smooth Operation
- High Safety Standards
- Overflow Sensor

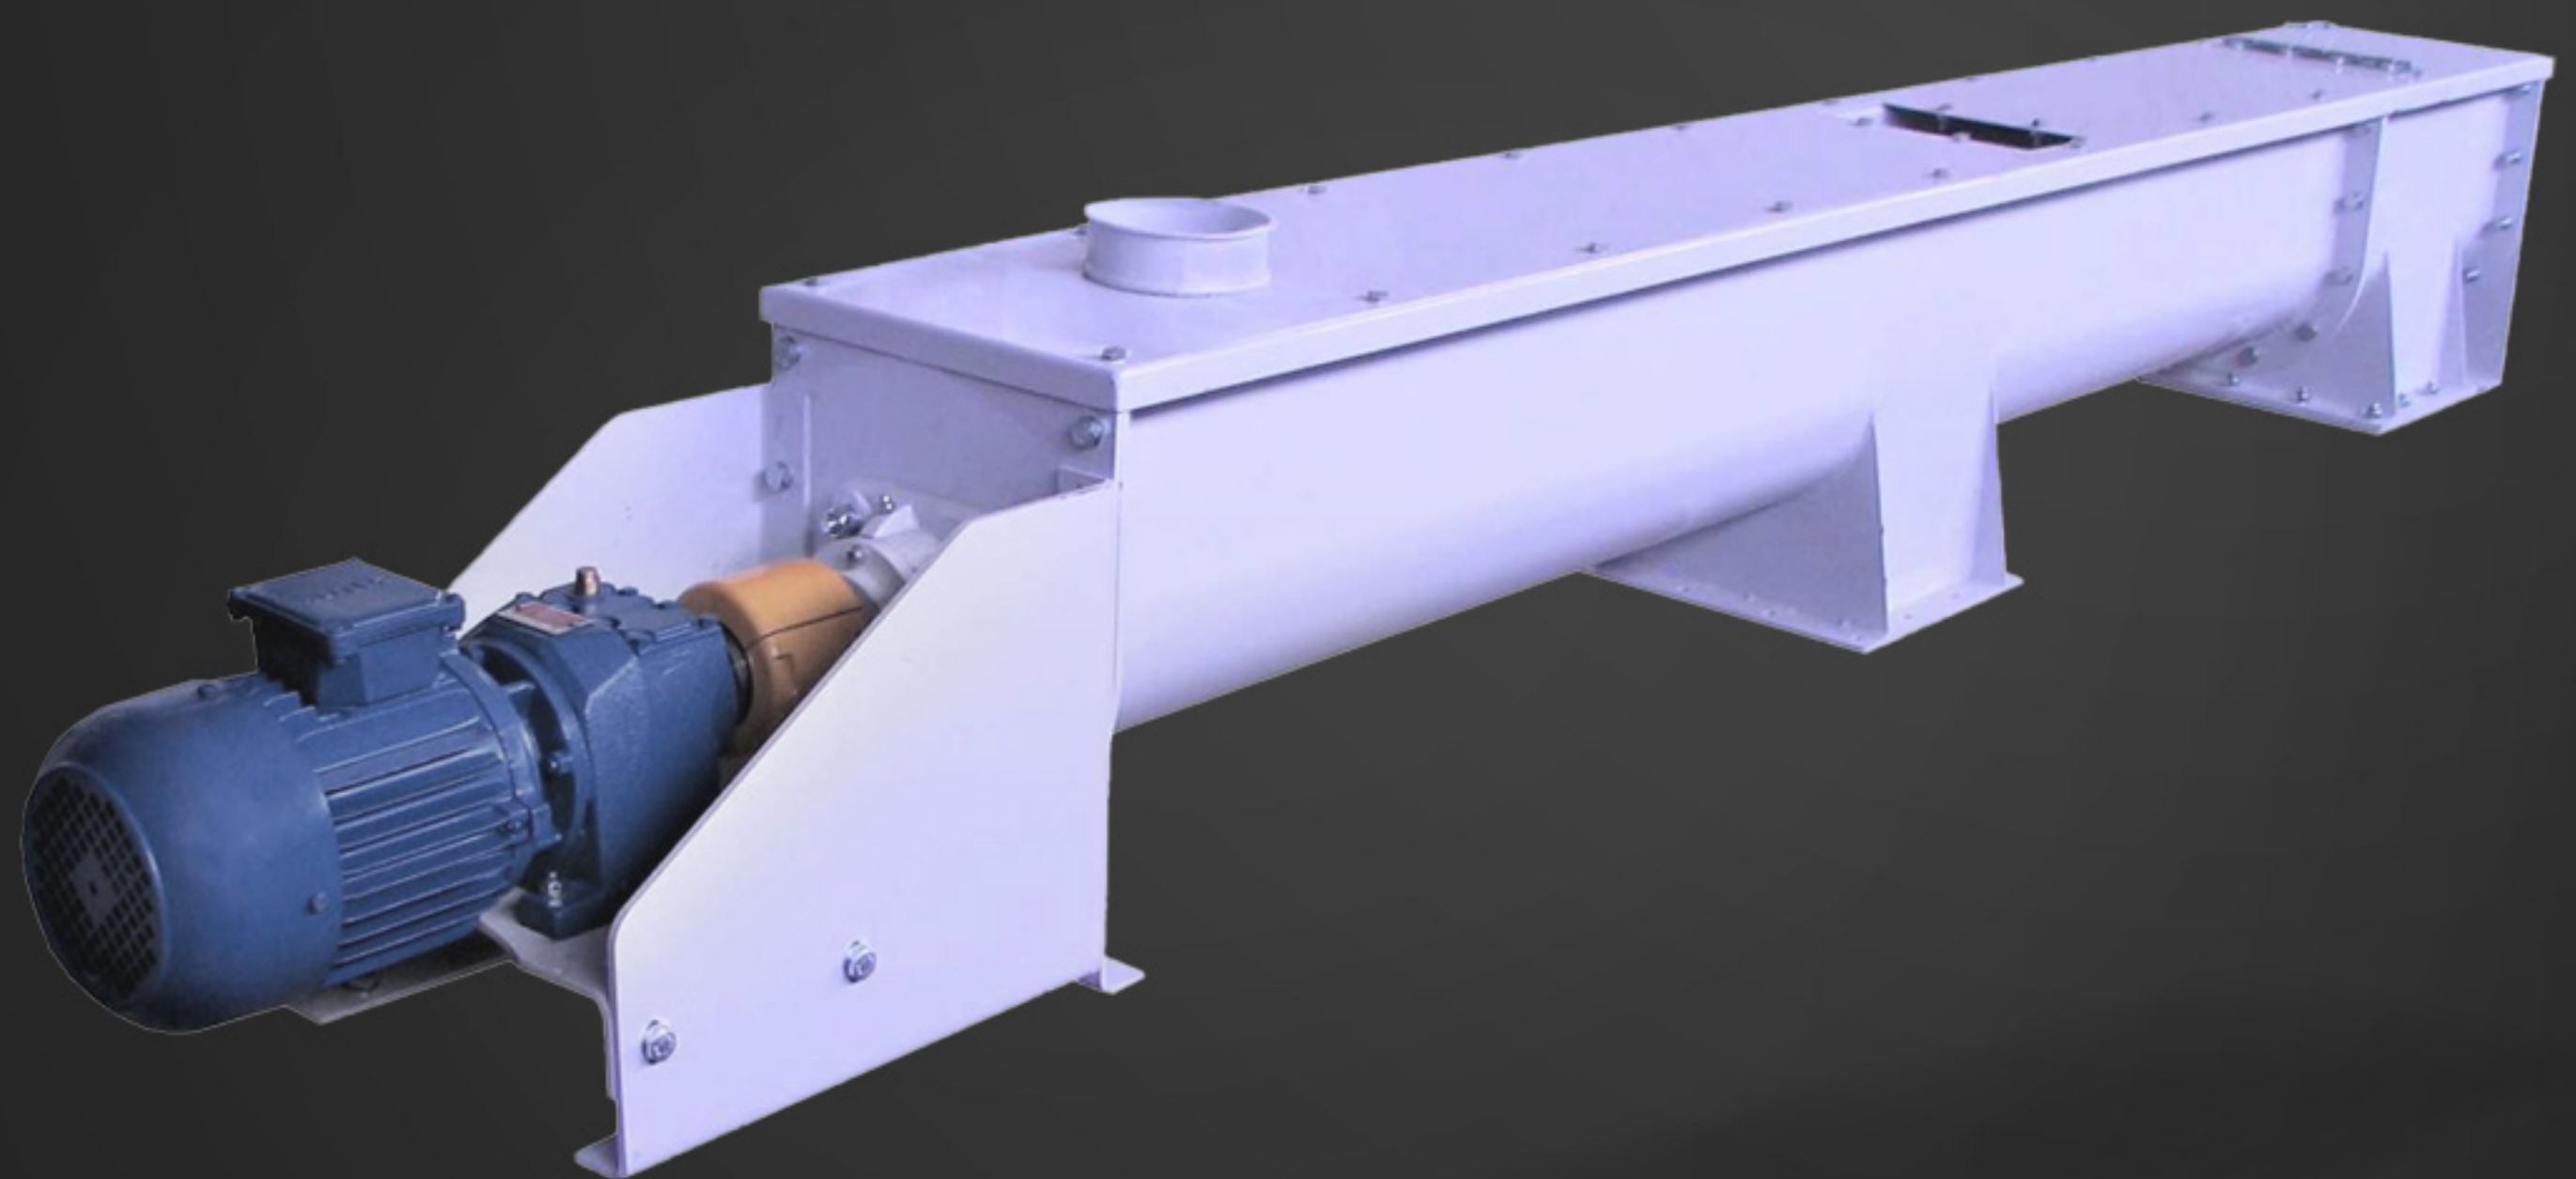


ADVANCED
SENSOR
TECHNOLOGY

HSKHVA

SCREW CONVEYOR

CONVOYEUR À VIS

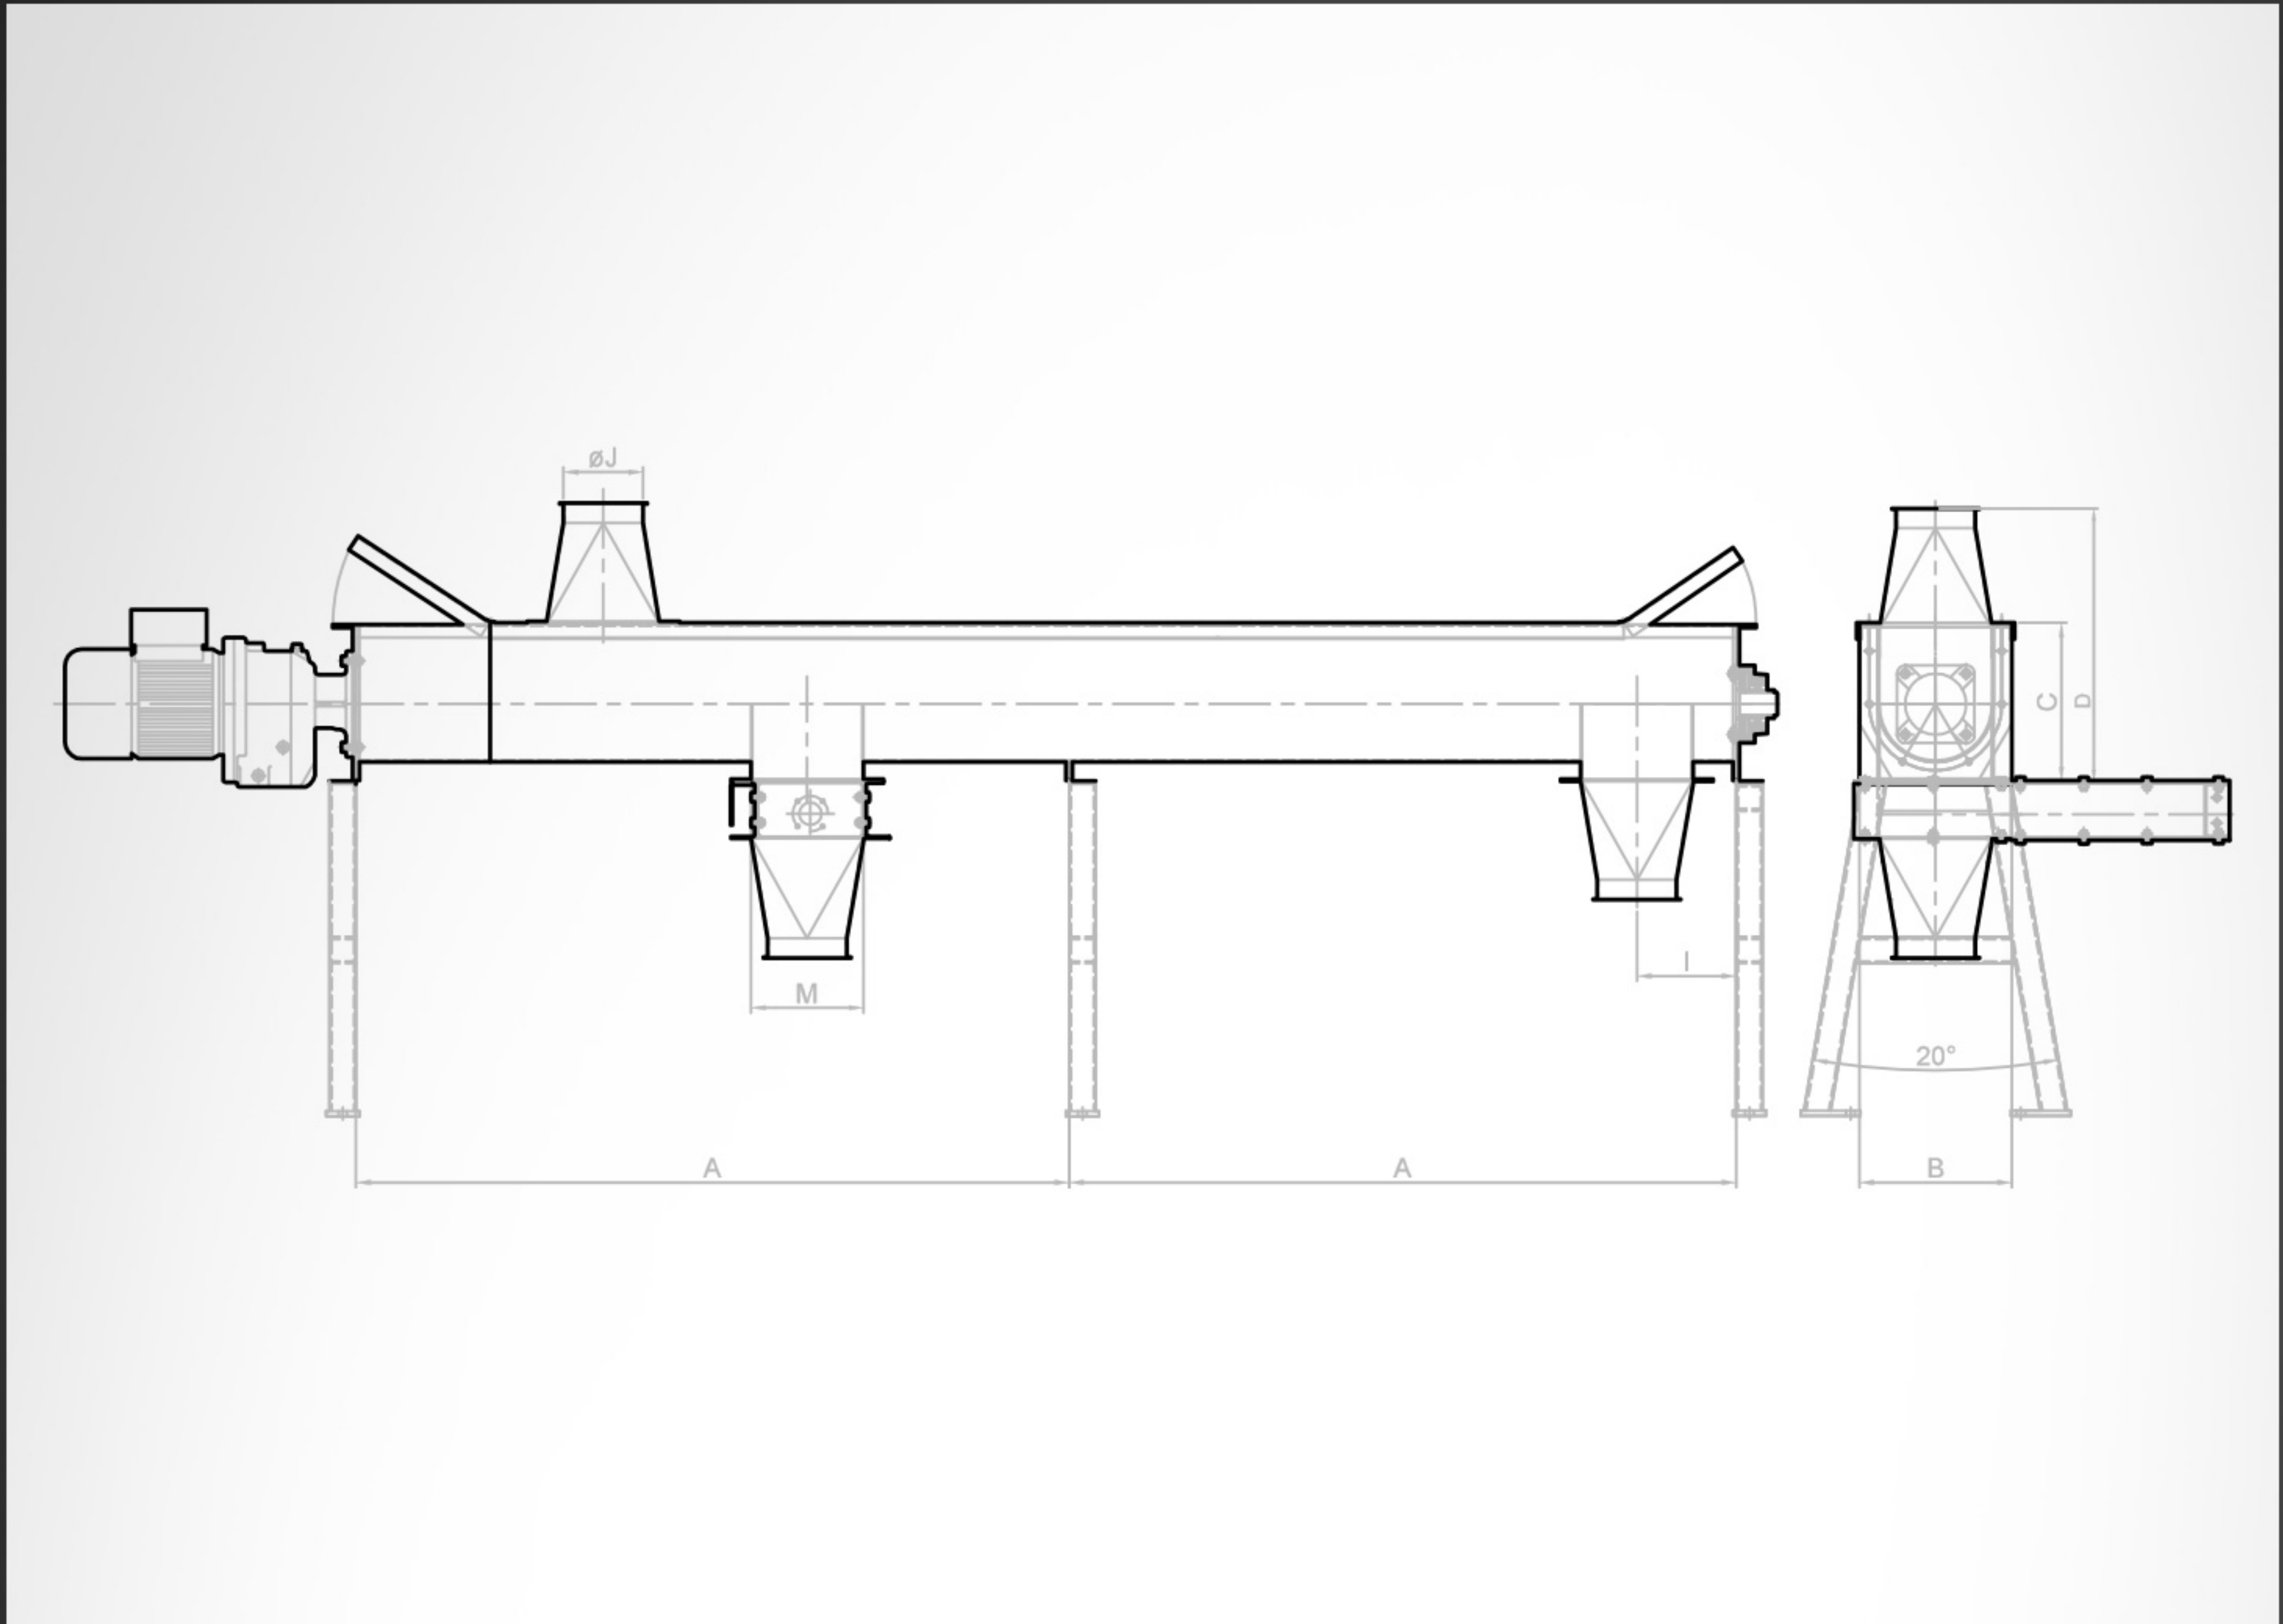

MODEL	DIMENSIONS mm.							TECHNICAL FEATURES					
	Module Length	B	C	D	M	I	ØJ	Capacity (t/h)					
	A							Wheat V=0,45m/s	Flour V=0,45m/s	Bran V=0,45m/s	Corn V=0,45m/s	Semolina V=0,45m/s	
HSKHVA 150	1500, 1700, 1900, 2100, 2300, 2500	230	240	390	170x170	170	150	10	7	4	9	6	
HSKHVA 200		300	300	500	220x220	220		17	12	7	15	10	
HSKHVA 250		350	365	465	270x270	270		27	19	11	24	16	
HSKHVA 300		400	430	730	320x320	320		39	28	15	35	23	
HSKHVA 350		450	510	810	380x380	380		200	53	38	21	47	31
HSKHVA 400		500	550	850	430x430	430			69	49	27	61	41
HSKHVA 450		550	600	900	470x470	470			88	63	35	79	52
HSKHVA 500		600	650	950	530x530	520			109	77	43	97	64