


HSKEKM ECLUSE

- It is used for regular product feeding in pneumatic conveying lines.

FEATURES

- Leakproof Structure
- High Durability
- Trouble Free Operation

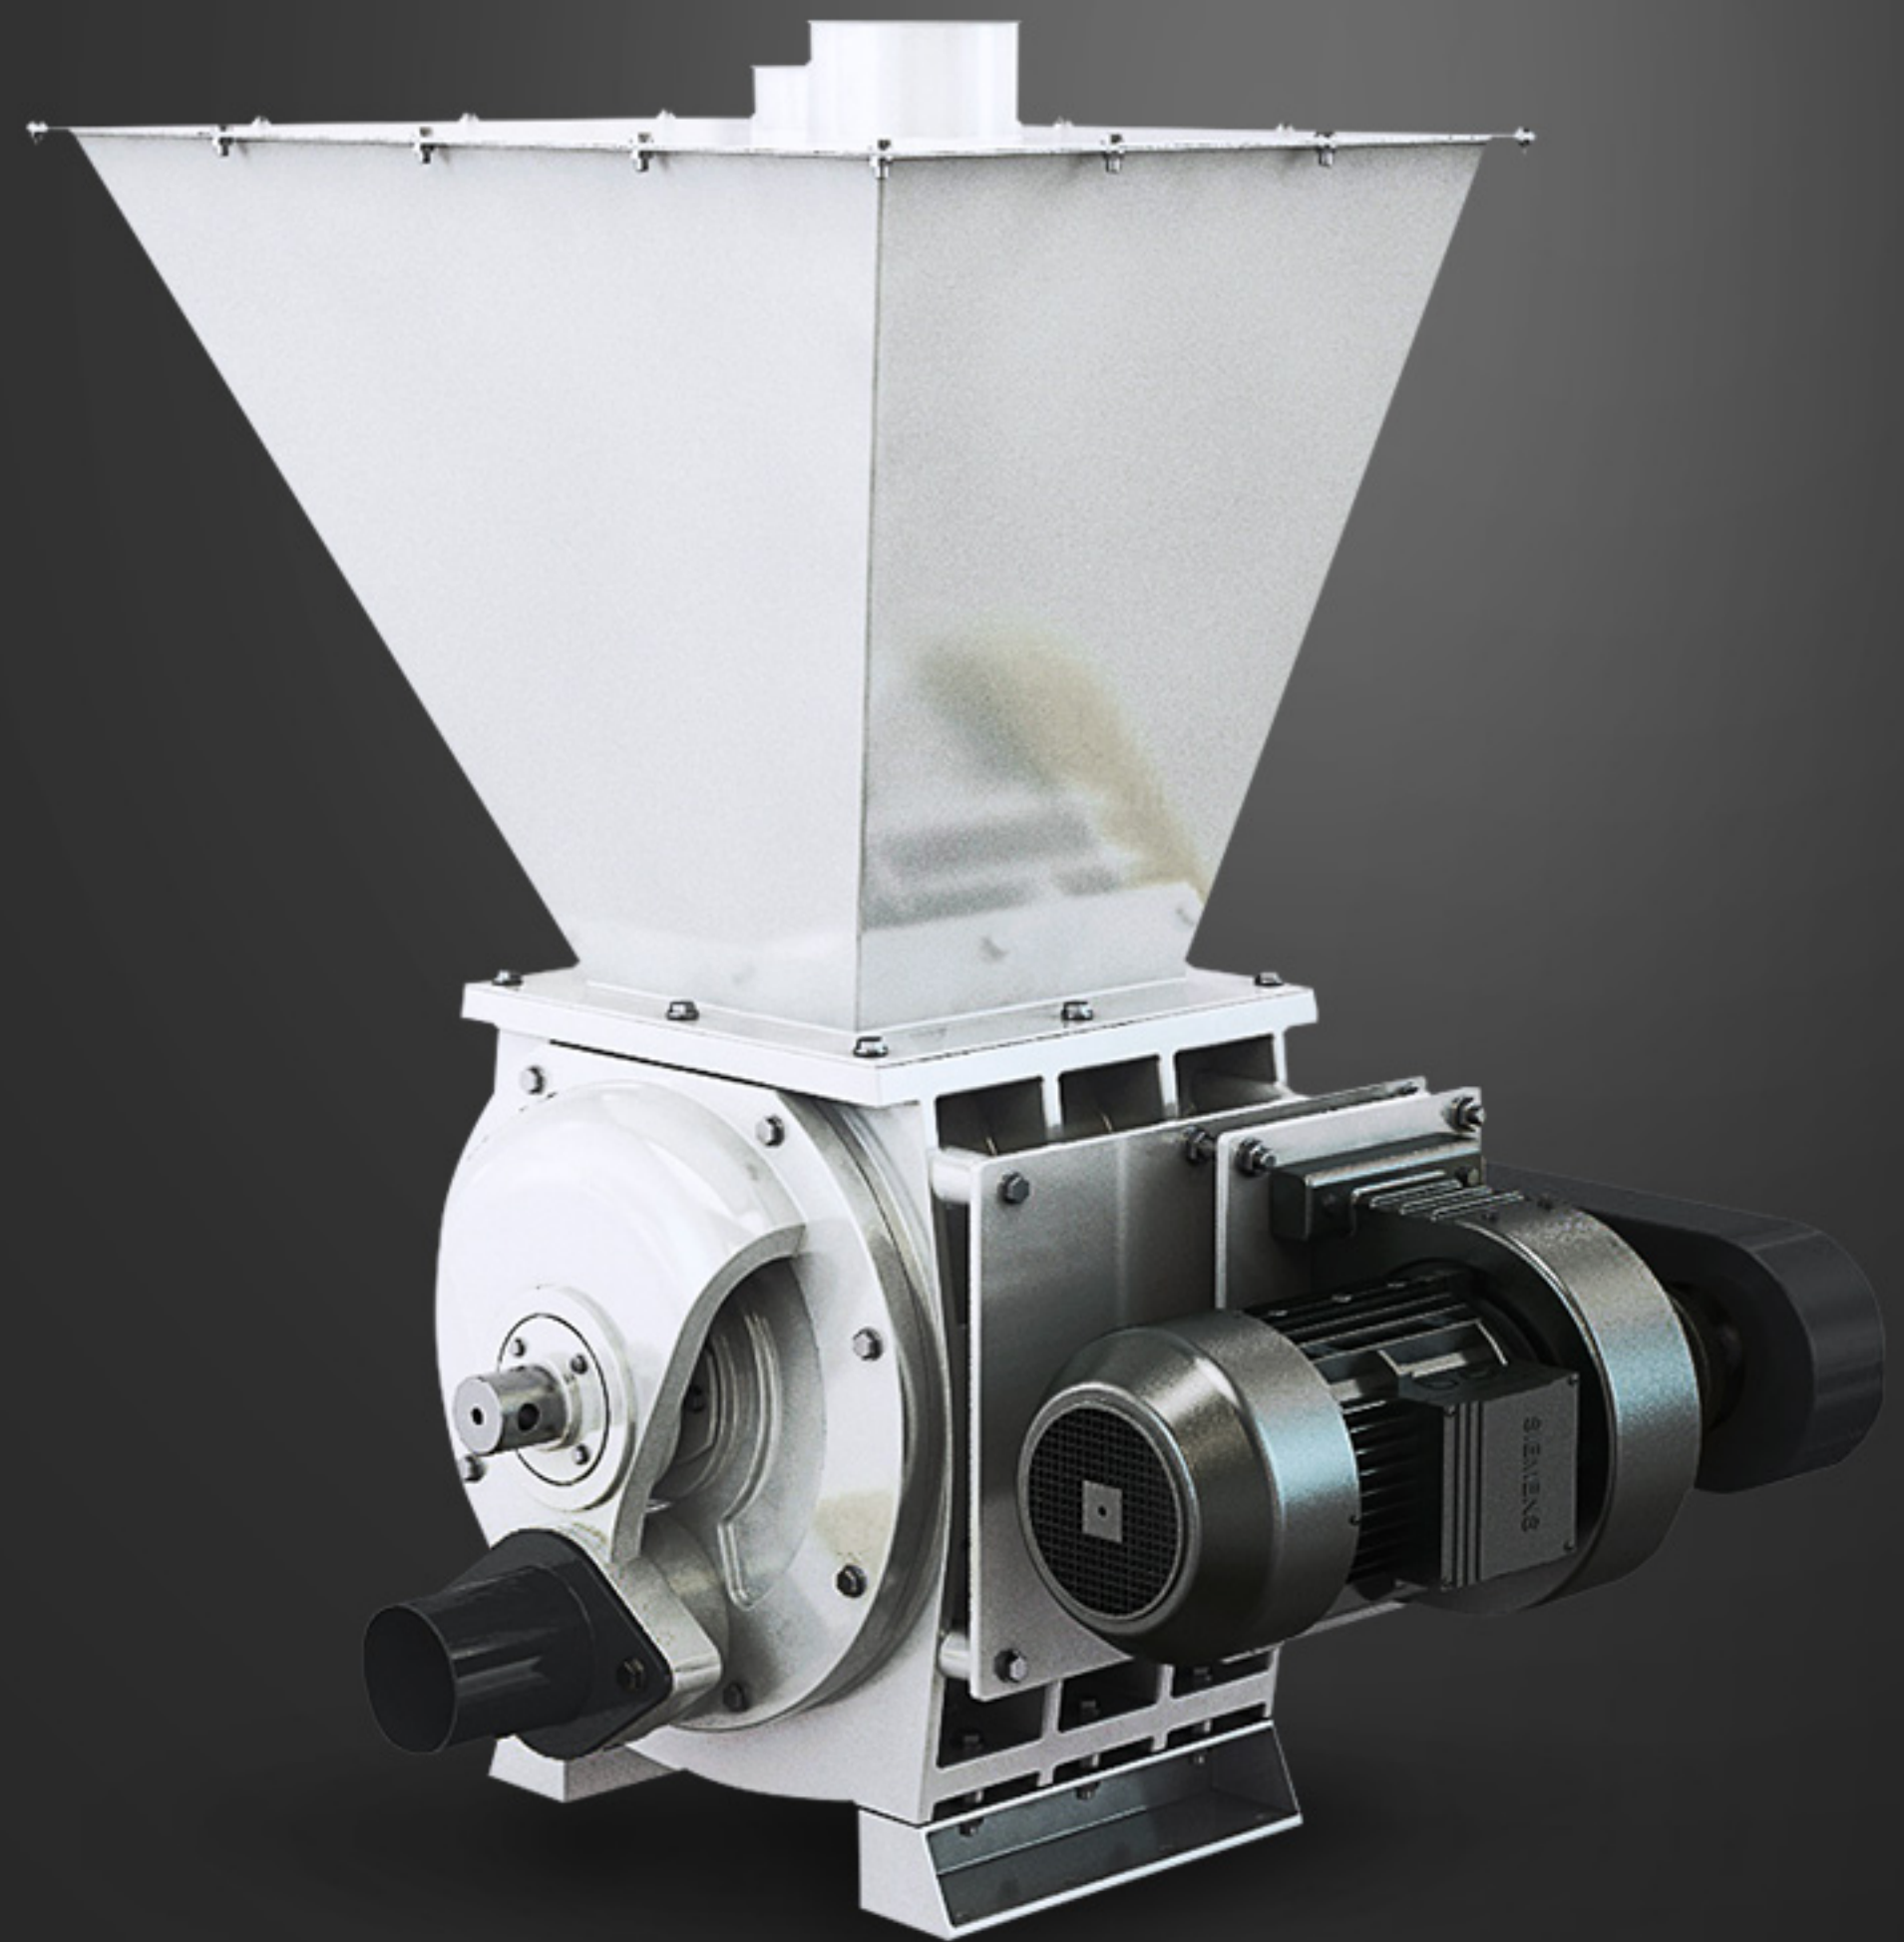


ADVANCED
SENSOR
TECHNOLOGY

HSKEKM

ECLUSE

ECLUSE

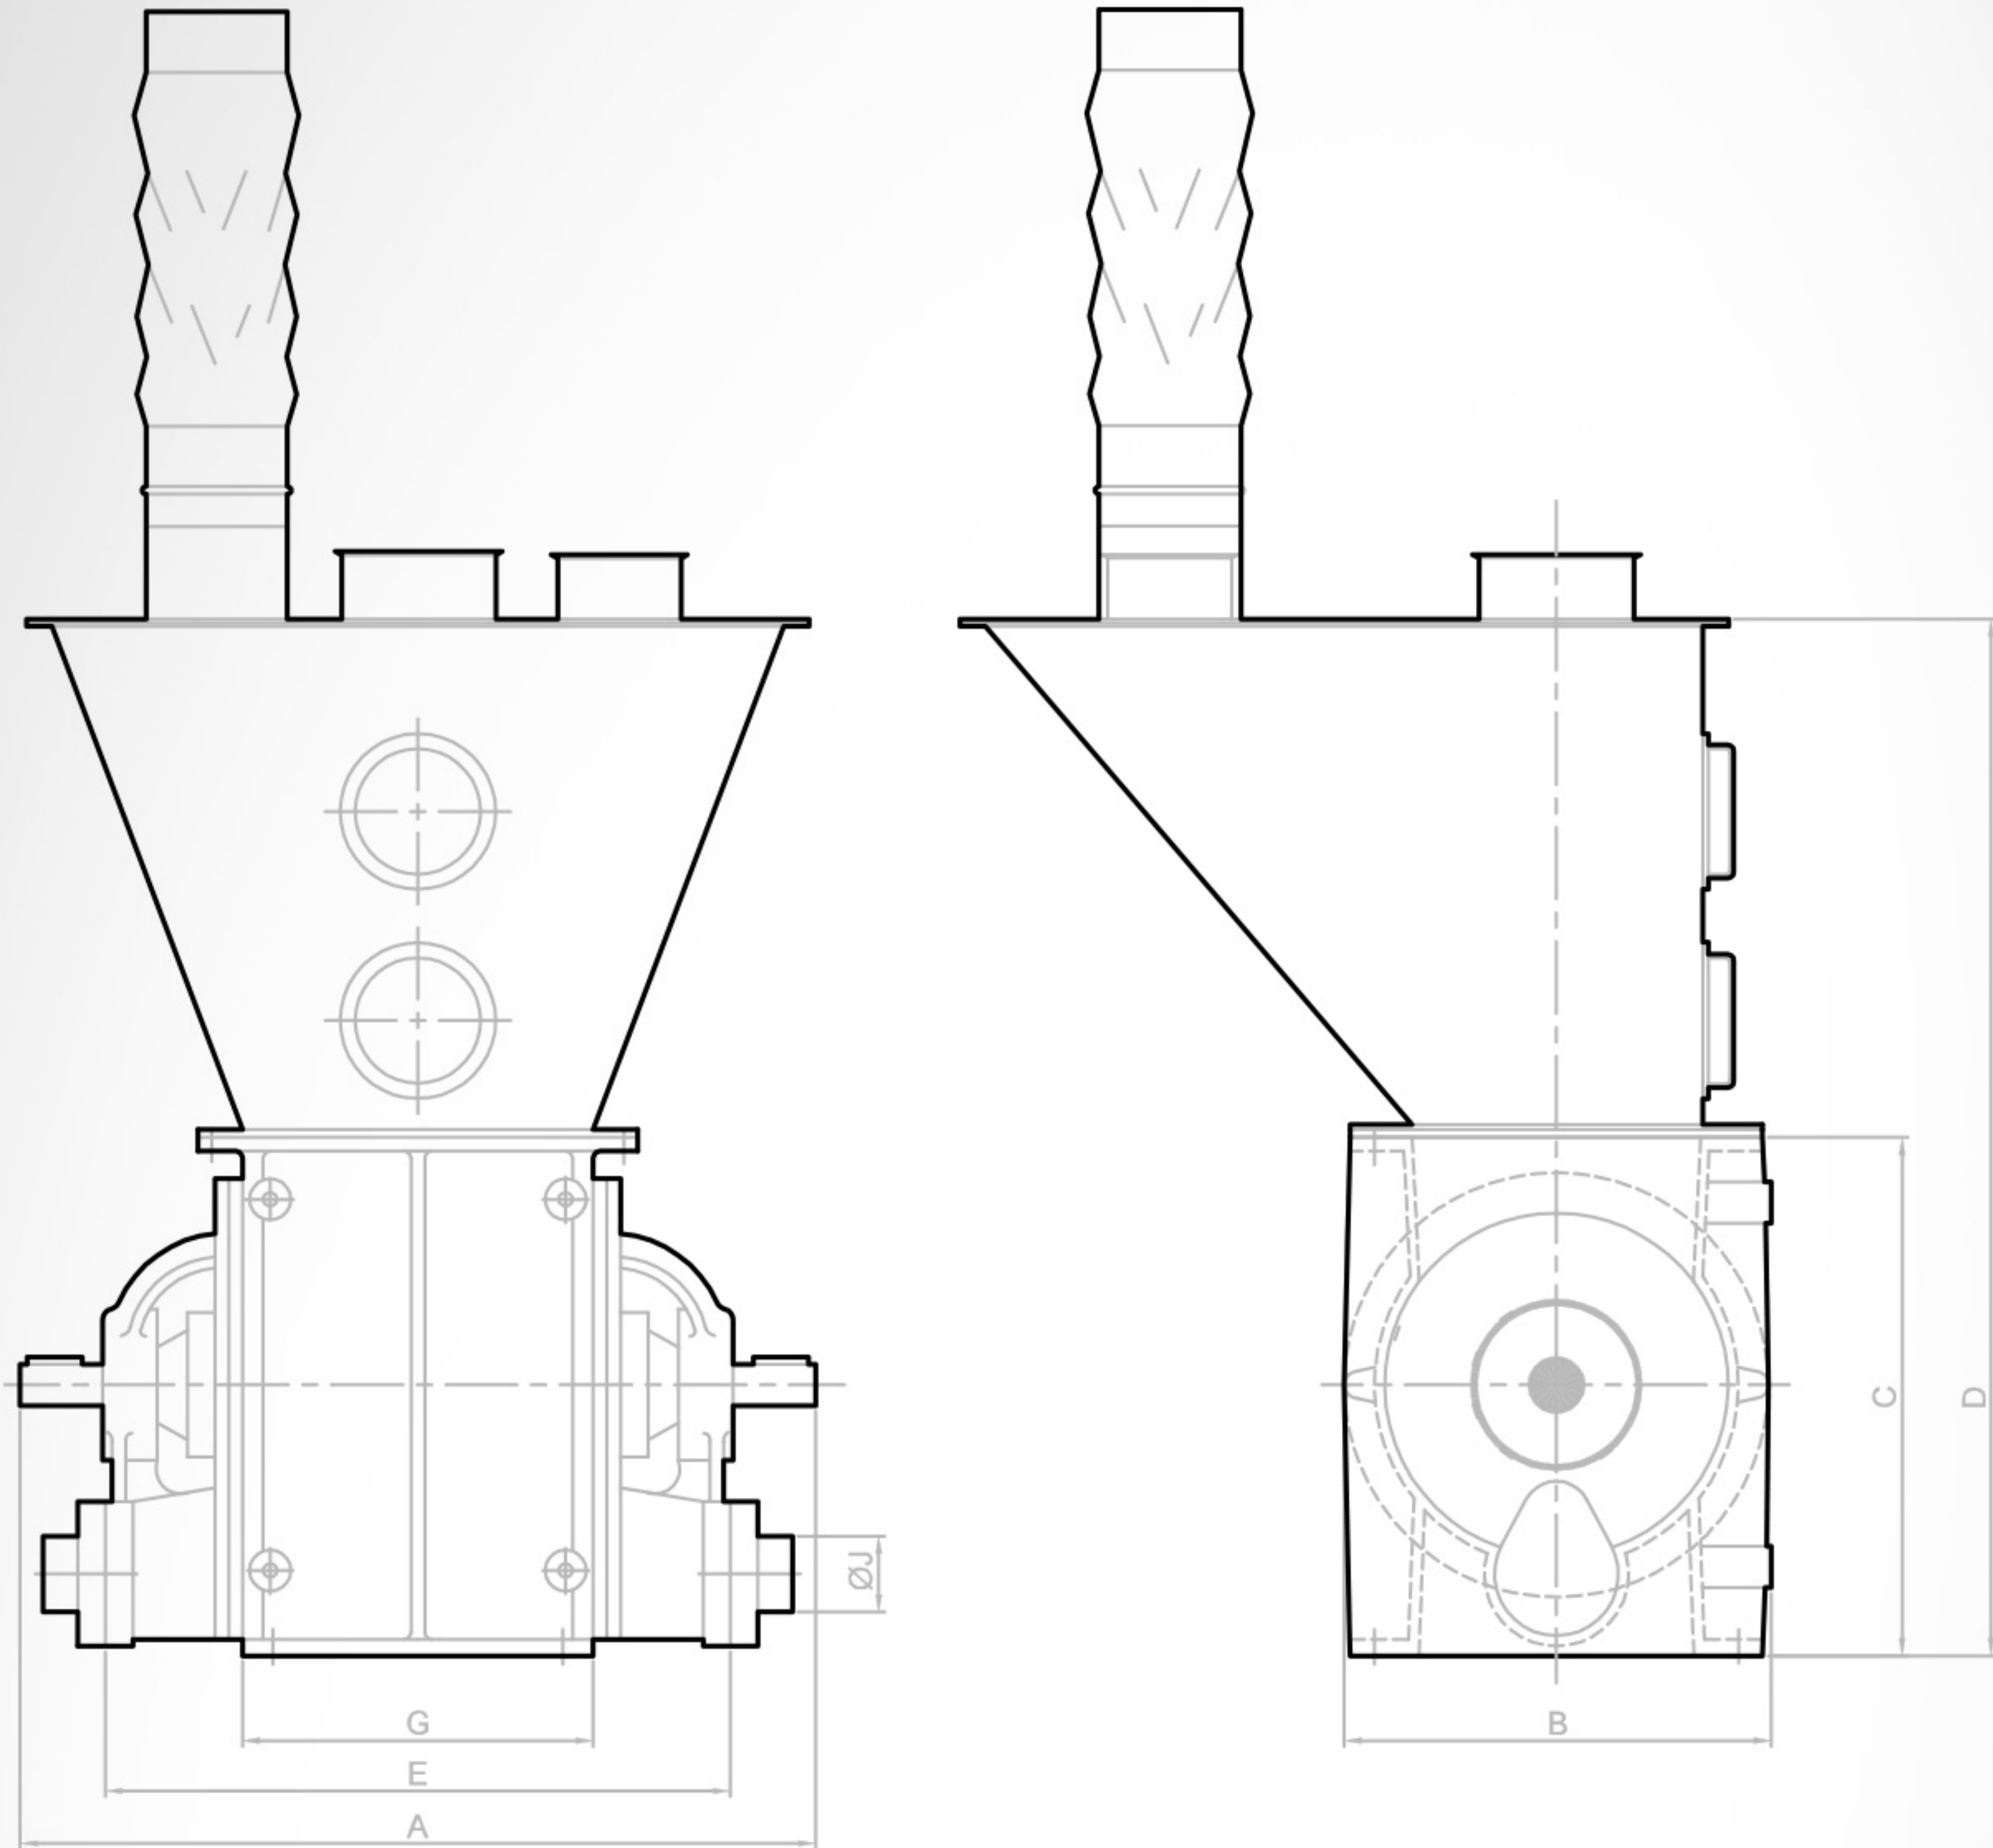

MODEL	DIMENSIONS mm.							TECHNICAL FEATURES							
	A	B	C	D	E	G	ØJ	Capacity (t/h) V=0,45 m/s - 0,50 m/s					Weight Kg		Gross volume m³
								Wheat	Flour	Bran	Corn	Semolina	Net	Gross	
HSKEKM 22/22	555	300	340	1620	440	440	65	6,2	4,5	2,5	5,6	3,7	167	199	0.6
HSKEKM 28/30	660	355	420	1700	538	310	80	11,3	8,1	4,5	10,2	6,8	211	320	0.9
HSKEKM 36/38	787	440	490	1970	645	405	105	22,9	15	8,4	19	12,5	280	331	1.3
HSKEKM 45/45	844	561	574	2054	703	436	120	27,1	19	10,9	24,6	16,3	410	473	1.8
HSKEKM 60/60	1034	720	794	2138	888	600	180	56,1	40,4	22,4	50,9	33,7	575	667	2.8