

CAROUSEL PACKING MACHINE

HSCTMA

The Carousel Packing Machine is used to effective packaging of the granular and processed products in 10 kg, 25 kg and 50 kg, Polypropylene (PP) bags at a high throughput.


Features & Advantages

- Aesthetic design and efficient operation
- Precise and high product throughput
- Low energy consumption
- Equipment durability



↓ Front View

↓ Side View

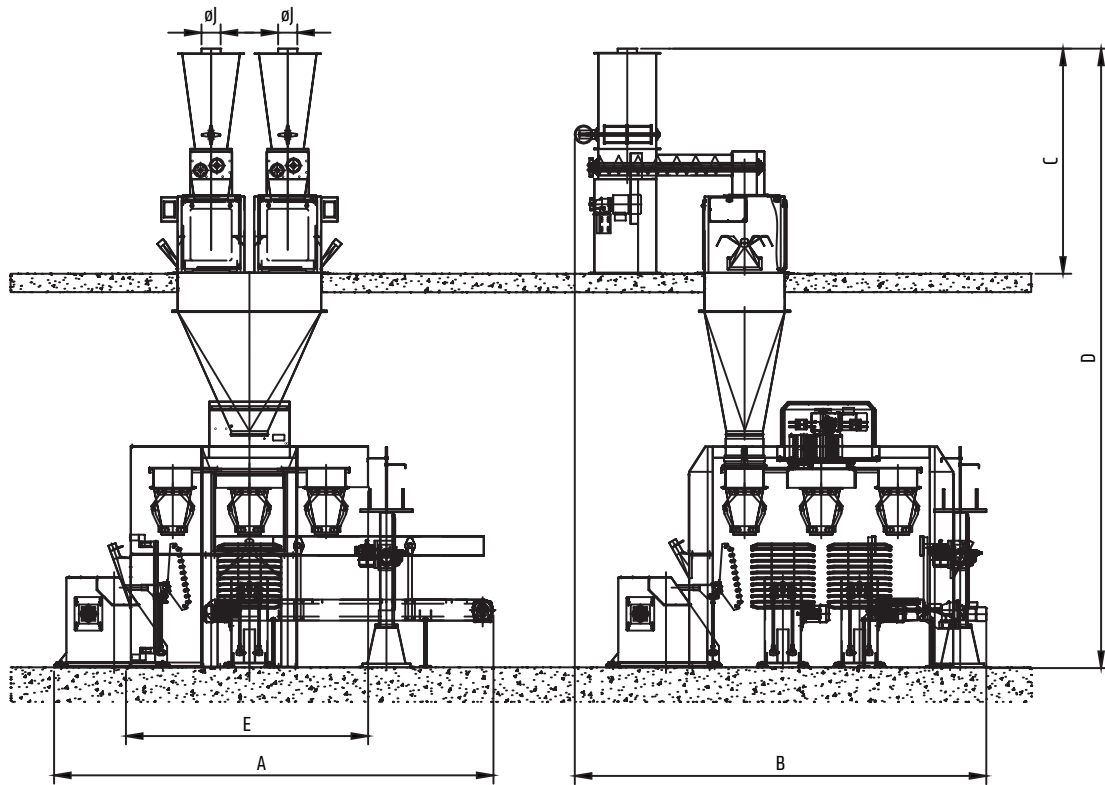

Technical Features

Model	Capacity (Bag per hour)	Motor Power (kW)	Number of Spout	Weight (Kg)		Gross Volume (m³)
				Net	Gross	
HSHTCMA 4	600	4 x 0.55	4	3,300	3,741	58.5
		2 x 0.75				
		2 x 1.5				
		2 x 2.2				
HSHTCMA 6	800	4 x 0.55	6	3,500	3,941	67.5
		3 x 0.75				
		2 x 1.5				
		2 x 2.2				

Dimensions (mm)

Model	A	B	C	D	E	øj
HSHTCMA 4	4,615	4,295	2,350	6,470	3,000	200
HSHTCMA 6						

*Henry Simon reserves the right to change, delete, or otherwise modify the information which is represented without any prior notice.